


# R&S® FS-Z10 Coherence Unit For phase-coherent RF measurements



**75** Years of  
Driving  
Innovation

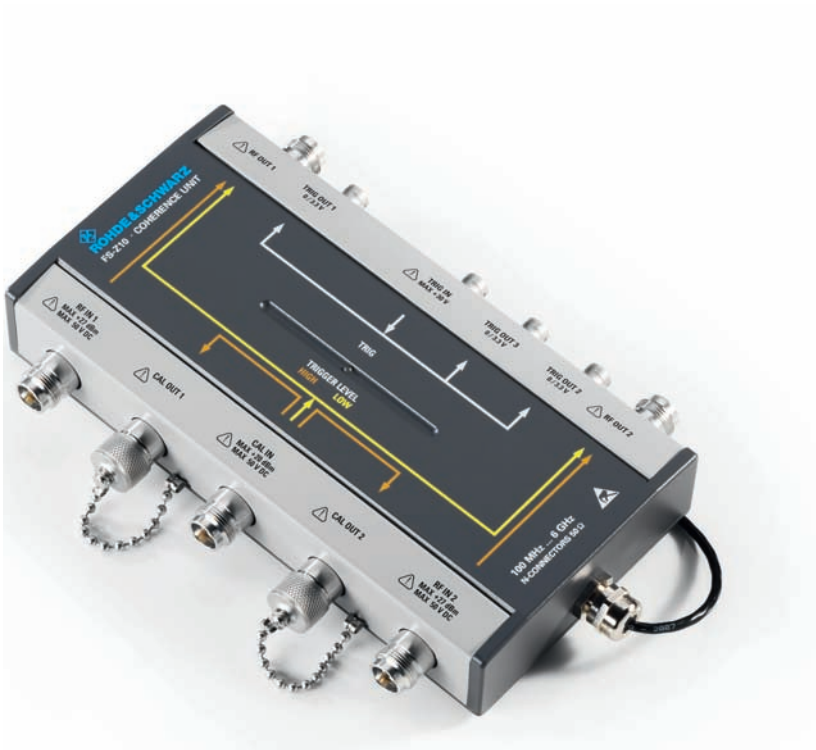

# R&S®FS-Z10 Coherence Unit At a glance

The R&S®FS-Z10 coherence unit in combination with two Rohde & Schwarz R&S®FSQ or R&S®FSG signal and spectrum analyzers enables phase-coherent RF measurements such as measuring phase, timing and gain differences of two RF signals. Moreover, it can compensate the phase, timing and gain difference of the digitized RF signal for further calculations. The R&S®FS-Z10 focusses on measurements on multi-antenna systems in aerospace and defense as well as in mobile communications, for instance MIMO beamforming.

The R&S®FS-Z10 coherence unit comes with a control software running on a PC. It controls the complete test setup, and calculates and displays the test results. It captures the I/Q data of the sampled RF signals from the analyzers and calculates the signal differences based on the I/Q data. This enables the compensation of the signal differences and saves the compensated or non-compensated I/Q data for further analysis.

The settings specified in the graphical user interface of the control software are used to configure the analyzers automatically. There are three different modes of operation:

- Calibration mode: automatic compensation of signal differences (phase, timing and/or amplitude) in the test setup including cables for connecting the device under test
- Measurement mode: measurement of signal differences (phase, timing and/or amplitude) between the signals of device under test
- Compensation mode: compensation of signal differences (phase, timing and/or amplitude) of the device under test

The R&S®FS-Z10 coherence unit supports the R&S®FSQ or R&S®FSG signal and spectrum analyzers from Rohde & Schwarz. This concept reduces investment costs because it allows existing equipment to be reused without modification and provides accurate measurement results:

- High-performance signal analyzers with excellent RF performance
- Signal analysis bandwidth up to 120 MHz with low EVM

## Key facts


- Frequency range 100 MHz to 6 GHz
- Phase-coherent two RF channel operation
- Design, test and calibration of multi-antenna systems
- Measurement of phase, timing and amplitude difference of RF signals
- Compensation of phase, timing and amplitude differences based on the I/Q data for further analysis

	Measurement Result	Calibration Result
Phase Difference ( $\varphi$ ) between A and B	-156.42 °	+6.73 °
Timing Difference ( $\tau$ ) between A and B	+2.04 ns	+569.49 ps
Gain Difference ( $g$ ) between A and B	+6.64 dB	+0.11 dB

The R&S®FS-Z10 control software lists all relevant results at a glance.



## Hardware setup

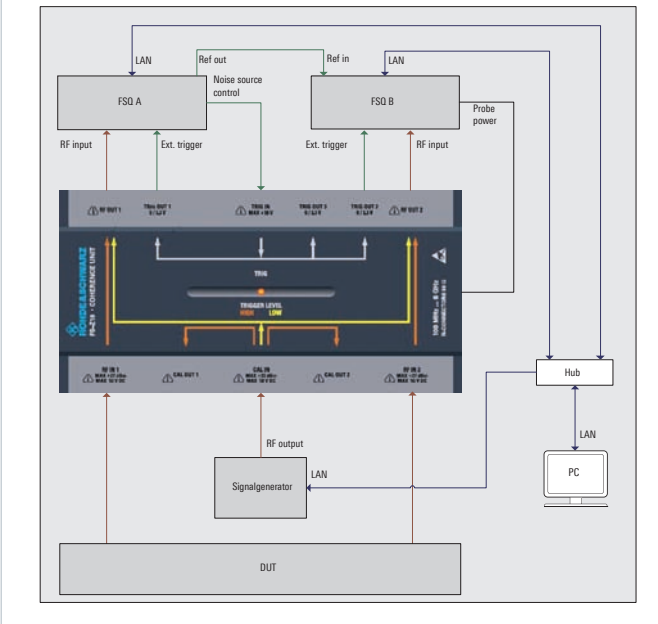

## Hardware setup

The Rohde & Schwarz measurement solution for phase-coherent measurement on RF signals consists of the following instruments:

- Two signal and spectrum analyzers (R&S®FSQ or R&S®FSG)
- R&S®FS-Z10 coherence unit
- R&S®FS-Z10 external coherence control software and desktop PC to run software
- Rohde & Schwarz signal generator to generate a reference signal (needed for calibration and during the measurement to align data acquisition of signal analyzers)

# Specifications in brief

## General data of the R&S®FS-Z10 coherence unit

Supported signal and spectrum analyzers	R&S®FSQ, R&S®FSG
Frequency range	100 MHz to 6 GHz
Signal analysis bandwidth (depending on base instrument)	R&S®FSQ: 28 MHz (optional 120 MHz) R&S®FSG: 28 MHz
Inputs	RF in1, RF in2, Cal in, Trig in
Outputs	RF out1, RF out2, Cal out1, Cal out2, Trig out1, Trig out2, Trig out3
Accuracy	phase: <math><3^\circ</math>, nominal, timing: <math><8.33\text{ ps}</math>, nominal (at 1 GHz) gain: <math><0.3\text{ dB}</math>, nominal

## R&S®FS-Z10 control software

Numeric results	phase, timing and gain difference of measurement and calibration
Graphical results	capture buffer display
Compensation	phase, timing and gain (optional)
Modes of operation	calibration mode, compensation mode, measurement mode
High-accuracy mode	A specific high-accuracy data file comes with each R&S®FS-Z10. This file contains information about the gain and phase differences of the R&S®FS-Z10 paths over frequency and thus further improves the measurement accuracy of the overall test setup.

# Ordering information

Designation	Type	Order No.
Coherence Unit for phase-coherent RF measurements (includes R&S®FS-Z10 control software)	R&S®FS-Z10	1171.6509.02

Your local Rohde & Schwarz expert will help you determine the optimum solution for your requirements and will be glad to provide you with a customized quotation.

To find your nearest Rohde & Schwarz representative, visit [www.sales.rohde-schwarz.com](http://www.sales.rohde-schwarz.com)

## Service you can rely on

- | Worldwide
- | Local and personalized
- | Customized and flexible
- | Uncompromising quality
- | Long-term dependability

## About Rohde & Schwarz

Rohde & Schwarz is an independent group of companies specializing in electronics. It is a leading supplier of solutions in the fields of test and measurement, broadcasting, radiomonitoring and radiolocation, as well as secure communications. Established 75 years ago, Rohde & Schwarz has a global presence and a dedicated service network in over 70 countries. Company headquarters are in Munich, Germany.

## Regional contact

Europe, Africa, Middle East

+49 1805 12 42 42\* or +49 89 4129 137 74

customersupport@rohde-schwarz.com

North America

1 888 TEST RSA (1 888 837 87 72)

customer.support@rsa.rohde-schwarz.com

Latin America

+1 410 910 79 88

customersupport.la@rohde-schwarz.com

Asia/Pacific

+65 65 13 04 88

customersupport.asia@rohde-schwarz.com



For data sheet, see  
PD 5214.2285.22  
and [www.rohde-schwarz.com](http://www.rohde-schwarz.com)

## Rohde & Schwarz GmbH & Co. KG

Mühldorfstraße 15 | 81671 München  
Phone +498941290 | Fax +4989412912164

[www.rohde-schwarz.com](http://www.rohde-schwarz.com)

R&S® is a registered trademark of Rohde & Schwarz GmbH & Co. KG  
Trade names are trademarks of the owners | Printed in Germany (as)  
PD 5214.2285.12 | Version 01.01 | March 2009 | R&S®FS-Z10  
Data without tolerance limits is not binding | Subject to change

\*0.14 €/min within German wireline network; rates may vary in other networks (wireline and mobile) and countries.