

R&S®AD066ST OMNIDIRECTIONAL UHF ANTENNA

225 MHz to 400 MHz

For naval UHF communications




The vertically polarized R&S®AD066ST omnidirectional UHF antenna covers the frequency range from 225 MHz to 400 MHz. Four dedicated receive/transmit systems with up to 200 W transmitter power each can be used with the antenna. Due to the antenna's decoupling characteristics, particularly between its upper and lower part, it can be operated in receive and transmit mode even with close frequencies.

The R&S®AD066ST is characterized by very good omnidirectional characteristics and a high gain.

The antenna's mechanical design is optimized for employment under tough environmental conditions, e.g. on board ships.

Key facts


- ▶ Four individually accessible dipoles
- ▶ High decoupling between individual dipoles
- ▶ For naval applications
- ▶ Ruggedized design for harsh environmental conditions

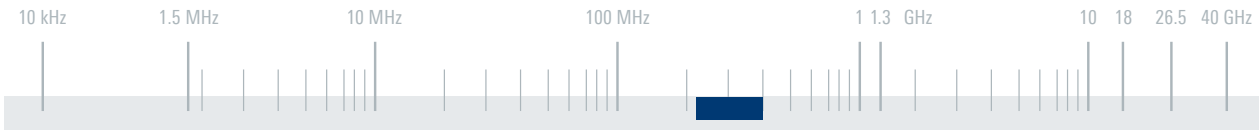

Specifications		
Frequency range	225 MHz to 400 MHz	
Polarization	linear, vertical	
Nominal impedance	50 Ω	
VSWR	≤ 2.5	
Gain	1.5 dBi (typ.)	
Polarization decoupling	> 20 dB	
Decoupling	between lower two dipoles	> 27 dB
	between upper two dipoles	> 27 dB
	between lower and upper dipoles	> 40 dB
Radiation pattern	horizontal: omnidirectional	
Maximum input power	4 times 200 W (CW)	
RF connector	4 N sockets	
MTBF	> 100 000 h	
Operating temperature range	-30°C to +70°C	
Protection class	IP65	
Maximum wind speed	without ice deposit	275 km/h
Dimensions	∅ × H	approx. 0.13 m (radome) × 5.4 m (0.4 ft × 18 ft)
Weight	approx. 85 kg (187 lb)	

Ordering information	Type	Order No.
Omnidirectional UHF antenna	R&S®AD066ST	4095.7003.02

Typical VSWR

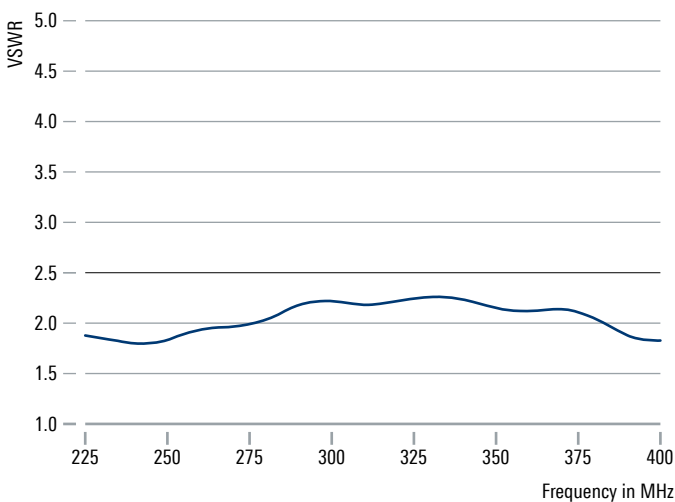

Typical decoupling between a lower (X1 or X2) and an upper dipole (X3 or X4)

