

R&S®FS-SNS

Smart Noise Source

Specifications

R&S®FS-SNS26, 10 MHz to 26.5 GHz

R&S®FS-SNS40, 100 MHz to 40 GHz

R&S®FS-SNS55, 100 MHz to 55 GHz



Definitions


General

Product data applies under the following conditions:

- Three hours storage at ambient temperature followed by 30 minutes warm-up operation in state: on
- Specified environmental conditions met
- Recommended calibration interval adhered to
- All internal automatic adjustments performed, if applicable

Specifications with limits

Represent warranted product performance by means of a range of values for the specified parameter. These specifications are marked with limiting symbols such as $<$, \leq , $>$, \geq , \pm , or descriptions such as maximum, limit of, minimum. Compliance is ensured by testing or is derived from the design. Test limits are narrowed by guard bands to take into account measurement uncertainties, drift and aging, if applicable.

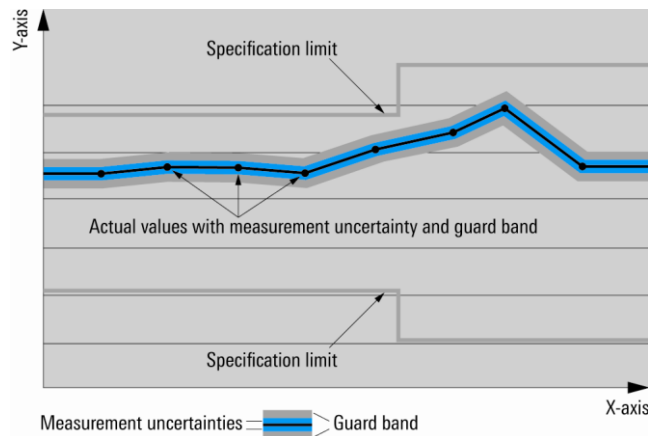

Specifications without limits

Represent warranted product performance for the specified parameter. These specifications are not specially marked and represent values with no or negligible deviations from the given value (e.g. dimensions or resolution of a setting parameter). Compliance is ensured by design.

Typical data (typ.)

Characterizes product performance by means of representative information for the given parameter. When marked with $<$, $>$ or as a range, it represents the performance met by approximately 80 % of the instruments at production time. Otherwise, it represents the mean value.

Nominal values (nom.)

Characterize product performance by means of a representative value for the given parameter (e.g. nominal impedance). In contrast to typical data, a statistical evaluation does not take place and the parameter is not tested during production.

Measured values (meas.)

Characterize expected product performance by means of measurement results gained from individual samples.

Uncertainties

Represent limits of measurement uncertainty for a given measurand. Uncertainty is defined with a coverage factor of 2 and has been calculated in line with the rules of the Guide to the Expression of Uncertainty in Measurement (GUM), taking into account environmental conditions, aging, wear and tear.

Device settings and GUI parameters are indicated as follows: "parameter: value".

Typical data as well as nominal and measured values are not warranted by Rohde & Schwarz.

Specifications

RF frequency range	R&S®FS-SNS26	10 MHz to 26.5 GHz
	R&S®FS-SNS40	100 MHz to 40 GHz
	R&S®FS-SNS55	100 MHz to 55 GHz
ENR	R&S®FS-SNS26	13 dB to 17 dB
	R&S®FS-SNS40	10 dB to 17 dB
	R&S®FS-SNS55	7 dB to 21 dB

Inputs and outputs

RF output		
Connector	R&S®FS-SNS26	APC 3.5 mm male (compatible with SMA)
	R&S®FS-SNS40	2.92 mm male (compatible with SMA)
	R&S®FS-SNS55	1.85 mm male (compatible with 2.4 mm)
Impedance		50 Ω
Maximum reverse power	CW RF power	1 W
VSWR	R&S®FS-SNS26	
	0.01 GHz ≤ f < 5 GHz	≤ 1.15:1
	5 GHz ≤ f < 18 GHz	≤ 1.25:1
	18 GHz ≤ f ≤ 26.5 GHz	≤ 1.35:1
	R&S®FS-SNS40	
	0.1 GHz ≤ f < 5 GHz	≤ 1.25:1
	5 GHz ≤ f < 18 GHz	≤ 1.30:1
	18 GHz ≤ f < 26.5 GHz	≤ 1.40:1
	26.5 GHz ≤ f ≤ 40 GHz	≤ 1.50:1
	R&S®FS-SNS55	
	0.1 GHz ≤ f < 5 GHz	≤ 1.50:1
	5 GHz ≤ f < 18 GHz	≤ 1.50:1
	18 GHz ≤ f < 26.5 GHz	≤ 1.75:1
	26.5 GHz ≤ f < 40 GHz	≤ 2.00:1
40 GHz ≤ f ≤ 55 GHz	≤ 2.50:1	

Power supply/control interface		
Connector	for power supply and control interface	7-pin LEMOSA/ODU female
DC supply voltage range	analog section	+28 V ± 2 V
	digital section	+5 V (nom.)
DC supply current	analog section	max. 30 mA
	digital section	< 500 mA, typ. 60 mA
Control interface		USB interface; supports USB 2.0 high speed and full speed modes
Test mark		CE

General data

Temperature	operating temperature range	+0 °C to +55 °C
	storage temperature range	−40 °C to +71 °C
Temperature coefficient		< 0.009 dB / °C
Climatic loading		+25 °C to +55 °C at 80 % rel. humidity, in line with EN 60068-2-30
Vibration	sinusoidal	5 Hz to 55 Hz displacement: 0.15 mm constant amplitude (1.8 g at 55 Hz); 55 Hz to 150 Hz acceleration: 0.5 g constant, in line with EN 60068-2-6
	random	10 Hz to 300 Hz, acceleration 1.2 g (RMS), in line with EN 60068-2-64
Shock		40 g shock spectrum, in line with MIL-STD-810E method no. 516.4, procedure I, MIL-PRF-28800F, class 3
Maximum operating altitude		4600 m above sea level
EMC		in line with EMC Directive 2004/108/EC including: IEC/EN 61326-1 ^{1, 2} IEC/EN 61326-2-1 CISPR 11/EN 55011 ¹
Dimensions	W × H × D	38.0 mm × 30.5 mm × 130.0 mm (1.50 in × 1.20 in × 5.12 in)
Weight		275 g (nom.) (0.6 lb)
Warranty		1 year
Recommended calibration interval		2 years

¹ Emission limits for class B equipment apply.

² Immunity test requirement for industrial environment (EN 61326 table 2).

Ordering information

Designation	Type	Order No.
Smart noise source, 10 MHz to 26.5 GHz	R&S®FS-SNS26	1338.8008.26
Smart noise source, 100 MHz to 40 GHz	R&S®FS-SNS40	1338.8008.40
Smart noise source, 100 MHz to 55 GHz	R&S®FS-SNS55	1338.8008.55
Options		
Noise figure measurements	R&S®FSW-K30	1313.1380.02
Noise figure measurements	R&S®FSV3-K30	1330.5045.02
Noise figure measurements	R&S®FSWP-K30	1325.4244.02
Accessories supplied with each R&S®FS-SNS		
Interface cable	R&S®SNSCABLE	1338.8020.00
Manual, carrying case		
Optional accessories		
Y adapter cable for legacy instruments	R&S®SNSCABLE-Y	1338.8066.00

Service that adds value

- | Worldwide
- | Local and personalized
- | Customized and flexible
- | Uncompromising quality
- | Long-term dependability

Rohde & Schwarz

The Rohde & Schwarz electronics group offers innovative solutions in the following business fields: test and measurement, broadcast and media, secure communications, cybersecurity, monitoring and network testing. Founded more than 80 years ago, the independent company which is headquartered in Munich, Germany, has an extensive sales and service network with locations in more than 70 countries.

www.rohde-schwarz.com

Sustainable product design

- | Environmental compatibility and eco-footprint
- | Energy efficiency and low emissions
- | Longevity and optimized total cost of ownership

Certified Quality Management

ISO 9001

Certified Environmental Management

ISO 14001

Rohde & Schwarz training

www.training.rohde-schwarz.com

Regional contact

- | Europe, Africa, Middle East | +49 89 4129 12345
customersupport@rohde-schwarz.com
- | North America | 1 888 TEST RSA (1 888 837 87 72)
customer.support@rsa.rohde-schwarz.com
- | Latin America | +1 410 910 79 88
customersupport.la@rohde-schwarz.com
- | Asia Pacific | +65 65 13 04 88
customersupport.asia@rohde-schwarz.com
- | China | +86 800 810 82 28 | +86 400 650 58 96
customersupport.china@rohde-schwarz.com

R&S® is a registered trademark of Rohde & Schwarz GmbH & Co. KG

Trade names are trademarks of the owners

PD 5216.2718.22 | Version 01.00 | February 2019 (fi)

R&S®FS-SNS Smart Noise Source

Data without tolerance limits is not binding | Subject to change

© 2019 Rohde & Schwarz GmbH & Co. KG | 81671 Munich, Germany



5216271822