


R&S®FSV-K93

WiMAX IEEE 802.16

SISO Analysis

Specifications

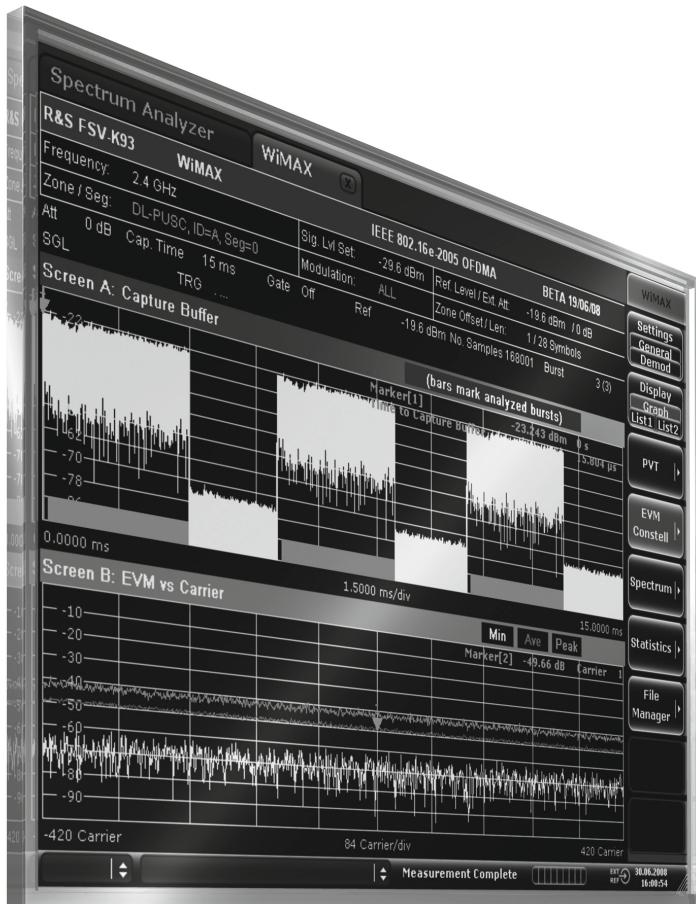

CONTENTS

Specifications.....	3
WiMAX IEEE 802.16 OFDM analysis (IEEE 802.16-2004/802.16-2005).....	3
<i>Level</i>	3
<i>Signal acquisition</i>	3
<i>Measurement parameters</i>	4
<i>Result display</i>	4
<i>Measurement uncertainty (nominal)</i>	5
WiMAX/WiBro IEEE 802.16 OFDMA SISO analysis (IEEE 802.16-2004, 802.16-2004/Cor1-2005, 802.16e-2005, P802.16-Rev2/D3 WiMAX and WiBro)	6
<i>Frequency</i>	6
<i>Level</i>	6
<i>Signal acquisition</i>	6
<i>Measurement parameters</i>	7
<i>Result display</i>	8
<i>Measurement uncertainty (nominal)</i>	9
Ordering information	10
Recommended options and extras	10

Specifications

The specifications of the R&S®FSV-K93 application firmware for WiMAX IEEE 802.16 SISO analysis are based on the data sheet of the R&S®FSV signal analyzer.

Specifications apply under the following conditions: 30 minutes warm-up time at ambient temperature, specified environmental conditions met, calibration cycle adhered to, and all internal automatic adjustments performed.

"Typical values" are designated with the abbreviation "typ." These values are verified during the final test but are not assured by Rohde & Schwarz. "Nominal values" are design parameters that are not assured by Rohde & Schwarz. These values are verified during product development but are not specifically tested during production.

WiMAX IEEE 802.16 OFDM analysis (IEEE 802.16-2004/802.16-2005)

Frequency

Frequency range	RF input	
	R&S®FSV3	50 MHz ¹ to 3.6 GHz
	R&S®FSV7	50 MHz ¹ to 7 GHz
Frequency setting		frequency, channel number
Nominal channel bandwidth		1.25 MHz to 28 MHz

Level

Level range	RF input	-60 dBm to +30 dBm
Level setting		auto, manual

Signal acquisition

Supported standards		IEEE 802.16-2004 OFDM, IEEE 802.16e-2005 OFDM P802.16-Rev2/D3 OFDM
Capture length	sampling rate (F_s) 1.44 MHz to sampling rate (F_s) 32 MHz	24 µs to 694.44 ms upper limit decreases linearly 24 µs to 31.25 ms
Gate length		24 µs to capture length
Number of analyzed bursts		1 to 10922 bursts
Result length	power versus time, EVM versus symbol, EVM versus carrier, frequency error versus preamble, phase error versus preamble, constellation versus symbol, constellation versus carrier, spectrum flatness, spectrum flatness difference, group delay, bit stream, burst summary FFT spectrum, CCDF result summary	capture length ² capture length or gate length capture length ² or 1 to 10922 bursts
Burst length	number of data symbols automatically detected, manually adjustable	1 to 2425 data symbols
Sweep time	spectrum mask adjacent channel power ratio (ACPR)	2.13 ms to 16000 s, auto 114 µs to 16000 s
Sweep count		1 to 32767
Trigger modes	RF input	free run, external, power

¹ 5 MHz to 50 MHz with restricted functionality depending on bandwidth (power trigger, auto level, IF overload).

² Max. 200 bursts per capture buffer.

Measurement parameters

Frequency band	predefined bands	preset combinations of sampling rate (F_s) and nominal channel bandwidth (BW) in line with standard
	unspecified	standard-compliant or user-defined F_s /BW ratios
Sampling rate (F_s), channel bandwidth (BW)		If one of the parameters is set, the other is automatically set as required for the selected standard. The frequency band setting is taken into account.
Guard period ratio $G = T_g / T_b$		1/4, 1/8, 1/16, 1/32
Link mode		downlink (DL), uplink (UL)
Modulation detection		none, first symbol, user, all (auto demod.)
Modulation format		BPSK, QPSK, 16QAM, 64QAM
Subchannelization	uplink	on/off
Subchannel index	uplink	1 to 31
UL physical modifier	uplink	0 to 255
Pilot tracking		phase on/off timing on/off level on/off
Channel estimation		preamble, preamble and payload
Spectrum emission mask	standard	IEEE, ETSI
	user-definable	The spectrum emission mask is measured in line with the user setting files.

Result display

Result summary	min./mean/max. values	EVM all carriers, EVM data carriers, EVM pilot carriers, I/Q offset, gain imbalance, quadrature error, frequency error, clock error, burst power, crest factor, RSSI, RSSI standard deviation, CINR, CINR standard deviation
Power versus time		full burst start/end burst view depending on selected burst
EVM	min./mean/max. values	EVM versus symbol EVM versus carrier
Error versus preamble	min./mean/max. values	frequency error versus preamble phase error versus preamble
Spectrum	min./mean/max. values	spectrum flatness spectrum flatness difference
	min./mean/max. values	group delay
	clear/write, max. hold	IEEE ³ , ETSI ⁴ , user-definable spectrum mask
	clear/write, max. hold	ACPR (absolute/relative)
	clear/write	FFT spectrum
Constellation		constellation versus symbol constellation versus carrier
Statistics		CCDF bit stream burst summary list modulation format, burst length in symbols, power, EVM

³ In line with [1] IEEE 802.16-2004.⁴ In line with [10] ETSI EN 301 021 V1.6.1 (2003-07).

Limit check	values in line with standard	result list
		EVM, I/Q offset, frequency error, clock error
		spectrum flatness
		spectrum flatness difference
		spectrum mask
		IEEE ⁵ , ETSI ⁶ , user-definable

Measurement uncertainty (nominal)

Residual EVM	level –30 dBm to +15 dBm, average of 20 bursts	
	f = 2.4 GHz or 5 GHz	
	DL ⁷	
	channel estimation: preamble and payload	–45 dB
Frequency error	UL ⁸	–45 dB
Max. measurement frequency window	DL ⁷ , UL ⁸	50 ppm
Uncertainty		1 Hz + R&S®FSV frequency uncertainty (see R&S®FSV reference frequency)
Level uncertainty	test of spectrum mask	like R&S®FSV (see R&S®FSV total measurement uncertainty)
	output power	like R&S®FSV (see R&S®FSV total measurement uncertainty)
	adjacent channel power ratio (ACPR)	like R&S®FSV (see R&S®FSV total measurement uncertainty)

⁵ In line with [1] IEEE 802.16-2004.

⁶ In line with [10] ETSI EN 301 021 V1.6.1 (2003-07).

⁷ This result is based on the following downlink signal: BW = 10 MHz, T_g/T_b = 1/8. The downlink subframe contains one burst of 30 OFDM symbols using a QPSK modulation format.

⁸ This result is based on the following uplink signal: BW = 10 MHz, T_g/T_b = 1/8. The uplink subframe contains one burst of 30 OFDM symbols using a QPSK modulation format.

WiMAX/WiBro IEEE 802.16 OFDMA SISO analysis

(IEEE 802.16-2004, 802.16-2004/Cor1-2005, 802.16e-2005, P802.16-Rev2/D3 WiMAX and WiBro)

Frequency

Frequency range	RF input	
	R&S®FSV3	50 MHz ⁹ to 3.6 GHz
Nominal channel bandwidth	R&S®FSV7	50 MHz ⁹ to 7 GHz
		1.25 MHz to 28 MHz

Level

Level range	RF input	-60 dBm to +30 dBm
Level setting		auto manual

Signal acquisition

Supported standards		IEEE 802.16-2004 OFDMA SISO IEEE 802.16-2004/Cor1-2005 OFDMA SISO IEEE 802.16e-2005 OFDMA SISO P802.16-Rev2/D3 OFDMA SISO IEEE 802.16e-2005 based WiBro
Capture length	sampling rate (F_s) 1.44 MHz to sampling rate (F_s) 32 MHz	24 µs to 714.29 ms upper limit decreases linearly 24 µs to 31.25 ms
Gate length		24 µs to capture length
Number of analyzed subframes		1 to 10922 subframes
Result length	EVM versus symbol, burst summary list, constellation versus symbol, bit stream FFT spectrum, CCDF result summary, power versus time, EVM versus carrier, spectrum flatness, spectrum flatness difference, group delay, frequency error versus sample, phase error versus sample	capture length ¹⁰ capture length or gate length capture length ¹⁰ or 1 to 10922 subframes
Frame length		2 ms to 20 ms
Sweep time	spectrum mask, adjacent channel power ratio (ACPR)	2.13 ms to 16000 s, auto 114 µs to 16000 s
Sweep count		1 to 32767
Trigger modes	RF input	free run, power, external

⁹ 5 MHz to 50 MHz with restricted functionality depending on bandwidth (power trigger, auto level, IF overload).

¹⁰ Max. 100 subframes per capture buffer.

Measurement parameters

Frequency band	predefined bands	preset combinations of sampling rate (F_s) and nominal channel bandwidth (BW) in line with standard
	unspecified	standard-compliant or user-defined F_s /BW ratios
Sampling rate (F_s), channel bandwidth (BW)		If one of the parameters is set, the other is automatically set as required for the selected standard. The frequency band setting is taken into account.
Guard period ratio $G = T_g / T_b$		1/4, 1/8, 1/16, 1/32
N_{FFT}		128, 512, 1024, 2048
Zones	downlink (DL) uplink (UL)	DL-PUSC, DL-FUSC, DL-AMC 2x3 UL-PUSC, UL-AMC 2x3
Signal analysis	DL	in line with signal DL-MAP (auto demod.), normal DL-MAP, compressed DL-MAP
	DL, UL	in line with user-defined frame configuration
ID_{cell}		0 to 31
Segments	DL-PUSC	0, 1, 2
Preamble	preamble mode, auto preamble mode, user	derived from ID_{cell} and segment setting in line with standard defined by preamble index in line with standard
Subchannel bitmap used	DL-PUSC	6-bit mask allocating subchannel groups to a segment
Burst modulation format		BPSK (pilots only), QPSK, 16QAM, 64QAM
Pilot tracking	DL, UL DL, UL	phase on/off, timing on/off, level on/off use pilots in line with standard ¹¹ use detected pilots ¹²
Channel estimation range	DL	preamble only preamble and payload payload only
	UL	payload only
Zone editor		
Zone/segment list	DL, UL	zone type, segment, length in symbols, offset in symbols, PermBase
	DL	PRBS_ID
Zone/segment map		graphical display of frame content defined by zone/segment list
Max. number of zones/segments per subframe/frame		26
Burst editor		
Burst list	DL	modulation, number of subchannels, number of symbols, offset in subchannels, offset in symbols, boosting, burst type: FCH, DL-MAP, data, restricted HARQ
	UL	modulation, duration in slots, offset in subchannels, offset in symbols, burst type: data, restricted fast feedback
Burst map		graphical display of zone/segment content defined by burst list

¹¹ The application computes the pilot modulation sequence used for tracking in line with the standard.

¹² The application detects the pilot modulation sequence used for tracking of the signal to be analyzed.

Max. number of bursts per zone/segment		32
Spectrum emission mask	standard	IEEE, ETSI, TTA
	user-definable	The spectrum emission mask is measured in line with the user setting files.

Result display

Frame configuration	auto demodulation	burst map in line with decoded signal map
Result summary	analyzed subframes min./mean/max. values	center frequency error, clock error, TD power DL preamble, TD power subframe, TD power zone, crest factor, RSSI, RSSI standard deviation, CINR, CINR standard deviation
	analyzed zones/segments min./mean/max. values	BER pilots, EVM data and pilots, EVM data, EVM pilots, unmodulated subcarrier error, I/Q offset, gain imbalance, quadrature error, power DL preamble, power data and pilots, power data, power pilots
Power versus time	min./mean/max. values	full subframe rising/falling
EVM	min./mean/max. values	EVM versus symbol EVM versus carrier
Error versus sample	min./mean/max. values	frequency error versus sample phase error versus sample
Spectrum	min./mean/max. values	spectrum flatness spectrum flatness difference
	min./mean/max. values	group delay
	clear/write, max. hold	IEEE ¹³ , ETSI ¹⁴ , TTA, user-definable spectrum mask
	clear/write, max. hold	ACP (absolute/relative)
	clear/write	FFT spectrum
Constellation		constellation diagram versus symbol
Statistics		CCDF
		bit stream
	downlink, uplink	erroneous pilots are highlighted ¹⁵
		burst summary: modulation format, burst area in slots, power, EVM
		result list
Limit check	values in line with standard	center frequency error, clock error, EVM data and pilots, EVM data, I/Q offset
		spectrum flatness
		spectrum flatness difference
		spectrum mask
		IEEE ¹⁶ , ETSI ¹⁷ , TTA, user-definable

¹³ In line with [1] IEEE 802.16-2004.¹⁴ In line with [10] ETSI EN 301 021 V1.6.1 (2003-07).¹⁵ The detected pilot sequence is compared with the pilot sequence in line with the standard. The pilot sequence in line with the standard depends on the ID_{cell}, frame number [UL], PRBS_ID [DL], PermBase [DL] user settings.¹⁶ In line with [1] IEEE 802.16-2004.¹⁷ In line with [10] ETSI EN 301 021 V1.6.1 (2003-07).

Measurement uncertainty (nominal)

Residual EVM	level –30 dBm to +15 dBm, average of 20 bursts f = 2.4 GHz or 5 GHz	
	DL ¹⁸ channel estimation: preamble and payload	–45 dB
	UL ¹⁹ channel estimation: payload	–45 dB
Frequency error		
Max. measurement frequency window	DL ¹⁸ , UL ¹⁹	30 ppm
Uncertainty		1 Hz + R&S®FSV frequency uncertainty (see R&S®FSV reference frequency)
Level uncertainty	test of spectrum mask	like R&S®FSV (see R&S®FSV total measurement uncertainty)
	output power	like R&S®FSV (see R&S®FSV total measurement uncertainty)
	ACPR (adjacent channel power ratio)	like R&S®FSV (see R&S®FSV total measurement uncertainty)

¹⁸ This result is based on the following downlink signal: BW = 8.75 MHz, N_{FFT} = 1024, all 30 subchannels assigned to segment 0.

The segment contains a downlink PUSC zone with one burst of 30 subchannels and 30 OFDMA symbols using a QPSK modulation format.

¹⁹ This result is based on the following uplink signal: BW = 8.75 MHz, N_{FFT} = 1024, all 35 subchannels being used.

The uplink PUSC zone contains one burst of 35 subchannels and 30 OFDMA symbols using a QPSK modulation format.

Ordering information

Designation	Type	Order No.
WiMAX IEEE 802.16 SISO Analysis	R&S®FSV-K93	1310.88955.02
Signal Analyzer, 9 kHz to 3.6 GHz	R&S®FSV4	1321.3008.04
Signal Analyzer, 9 kHz to 7 GHz	R&S®FSV7	1321.3008.07

Recommended options and extras

Designation	Type	Order No.	Retrofittable	Remarks
OCXO Reference Frequency	R&S®FSV-B4	1310.9522.02	yes	user-retrofittable
RF Preamplifier (9 kHz to 7 GHz)	R&S®FSV-B22	1310.9600.02	yes	user-retrofittable
Electronic Attenuator, 1 dB steps	R&S®FSV-B25	1310.9622.02	yes	user-retrofittable
40 MHz Analysis Bandwidth	R&S®FSV-B70	1310.9645.02	yes	user-retrofittable

See also the specifications for the R&S®FSV signal analyzer PD 3606.7982.22 and for product brochure, see PD 5214.0499.12 and www.rohde-schwarz.com

References

- [1] IEEE 802.16-2004, IEEE Standard for Local and Metropolitan Area Networks. October 1, 2004.
- [2] IEEE 802.16e-2005 and IEEE 802.16-2004/Cor1-2005. February 28, 2006. Amendment 2: Physical and Medium Access Control Layers for Combined Fixed and Mobile Operation in Licensed Bands and Corrigendum 1.
- [3] P802.16-Rev2/D2 (December 2007) (is a revision of IEEE 802.16-2004 and consolidates material from IEEE 802.16e-2005, IEEE 802.16-2004/Cor1-2005, IEEE 802.16f-2005 and IEEE 802.16g-2007).
- [4] P802.16-Rev2/D3 (February 2008) (is a revision of IEEE 802.16-2004 and consolidates material from IEEE 802.16e-2005, IEEE 802.16-2004/Cor1-2005, IEEE 802.16f-2005 and IEEE 802.16g-2007).
- [10] ETSI EN 301 021 V1.6.1 (2003-07). Fixed radio systems; point-to-multipoint equipment; time division multiple access (TDMA); point-to-multipoint digital radio systems in frequency bands in the range 3 GHz to 11 GHz.

Service that adds value

- | Worldwide
- | Local and personalized
- | Customized and flexible
- | Uncompromising quality
- | Long-term dependability

About Rohde & Schwarz

The Rohde & Schwarz electronics group is a leading supplier of solutions in the fields of test and measurement, broadcasting, secure communications, and radiolocation. Founded more than 80 years ago, this independent global company has an extensive sales network and is present in more than 70 countries. The company is headquartered in Munich, Germany.

Sustainable product design

- | Environmental compatibility and eco-footprint
- | Energy efficiency and low emissions
- | Longevity and optimized total cost of ownership

Certified Quality Management

ISO 9001

Certified Environmental Management

ISO 14001

Rohde & Schwarz GmbH & Co. KG

www.rohde-schwarz.com

Regional contact

- | Europe, Africa, Middle East | +49 89 4129 12345
customersupport@rohde-schwarz.com
- | North America | 1 888 TEST RSA (1 888 837 87 72)
customer.support@rsa.rohde-schwarz.com
- | Latin America | +1 410 910 79 88
customersupport.la@rohde-schwarz.com
- | Asia Pacific | +65 65 13 04 88
customersupport.asia@rohde-schwarz.com
- | China | +86 800 810 8228 | +86 400 650 5896
customersupport.china@rohde-schwarz.com

R&S® is a registered trademark of Rohde & Schwarz GmbH & Co. KG

Trade names are trademarks of the owners

PD 5214.1466.22 | Version 02.00 | October 2014 (as)

R&S®FSV-K93 WiMAX IEEE 802.16 SISO Analysis

Data without tolerance limits is not binding | Subject to change

© 2008 - 2014 Rohde & Schwarz GmbH & Co. KG | 81671 Munich, Germany



5214146622