



# R&S® SMC100A Signal Generator

## Smallest size and best price/performance ratio

The perfect choice for



RF teaching labs

Simple production applications

A&D development/  
service/maintenance

Service and  
maintenance

Key specifications	
Frequency range	9 kHz to 1.1/3.2 GHz
Max. output power	+13 dBm, +17 dBm (typ.) (f = 200 kHz to 3.2 GHz);
SSB phase noise (1 GHz; @ 10kHz; 1 Hz bw.)	< -105 dBc, -111 dBc (typ.)
Non-harmonics (1 GHz, level > -10 dBm; @ >10 kHz)	< -60 dBc, -72 dBc (typ.)
Modulation	AM/FM/φM/PM

A generator for every environment with the smallest size and best price/performance ratio

- ▶ Outstanding RF performance
- ▶ Graphical user interface
- ▶ 3-year calibration cycle
- ▶ USB, Ethernet and GPIB connectivity
- ▶ Small footprint, lightweight and power-efficient


Your benefit	Features
Graphical interface allows you to set up the signal the way you think about it	<ul style="list-style-type: none"> <li>▶ Block diagram user interface</li> <li>▶ Graphic display of signals</li> <li>▶ Click, configure and control with a mouse</li> <li>▶ Mimics the functional blocks of a transmitter</li> </ul>
More performance across the board without costing more	<ul style="list-style-type: none"> <li>▶ Best phase noise performance</li> <li>▶ Fastest switching speed</li> <li>▶ Outstanding output power</li> <li>▶ Vastly superior modulation capabilities</li> </ul>
Ideal for the lab, production or the field	<ul style="list-style-type: none"> <li>▶ Lab: better performance</li> <li>▶ Production: higher speed, better connectivity</li> <li>▶ Field: size, weight, power efficiency</li> </ul>



For more information:

[www.rohde-schwarz.com/catalog/SMC100A](http://www.rohde-schwarz.com/catalog/SMC100A)

## Measured maximum available power

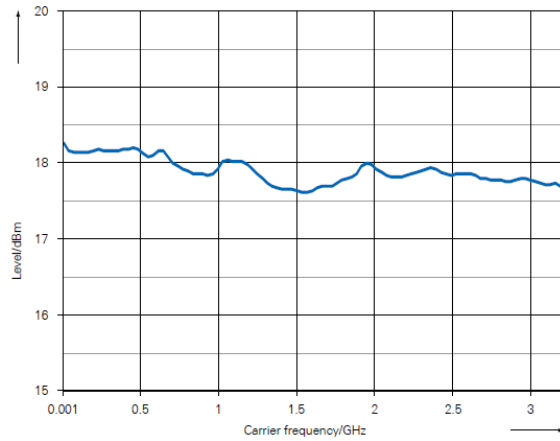

The high output power of typ. > +17 dBm enables measurements on DUTs such as mixers that require a high level for the local oscillator.

## Minimized total cost of ownership



A minimum of modules in the R&S SMC100A means high reliability and easy servicing.

Base unit	Model
Frequency Range	
9 kHz to 1.1 GHz	R&S SMC100A with SMC-B101
9 kHz to 3.2 GHz	R&S SMC100A with SMC-B103

**Included:** All models include power cable, quick start guide and three-year warranty

Popular options/accessories	
Description	Item
Reference oscillator OCXO	R&S SMC-B1
GPIO/IEEE488 interface	R&S SMC-K4

## Various connectivity



Integrate into current test setup without having to alter your USB, Ethernet or GPIB connectivity interface.

Rohde & Schwarz Representative