

# R&S®SzM

## FREQUENCY MULTIPLIER FAMILY

### Specifications



Specifications  
Version 03.00

**ROHDE & SCHWARZ**

Make ideas real



# CONTENTS

<b>Definitions .....</b>	<b>3</b>
<b>General information .....</b>	<b>4</b>
<b>Specifications.....</b>	<b>5</b>
RF performance.....	5
VSWR .....	7
Spectral purity .....	7
Output power plots .....	8
<b>General data .....</b>	<b>11</b>
<b>Ordering information .....</b>	<b>12</b>
<b>Warranty and service.....</b>	<b>13</b>

# Definitions


## General

Product data applies under the following conditions:

- Three hours of storage at ambient temperature followed by 30 minutes of warm-up operation
- Specified environmental conditions met
- Recommended calibration interval adhered to
- All internal automatic adjustments performed, if applicable

## Specifications with limits

Represent warranted product performance by means of a range of values for the specified parameter. These specifications are marked with limiting symbols such as  $<$ ,  $\leq$ ,  $>$ ,  $\geq$ ,  $\pm$  or descriptions such as maximum, limit of, minimum. Compliance is ensured by testing or is derived from the design. Test limits are narrowed by guard bands to take into account measurement uncertainties, drift and aging, if applicable.

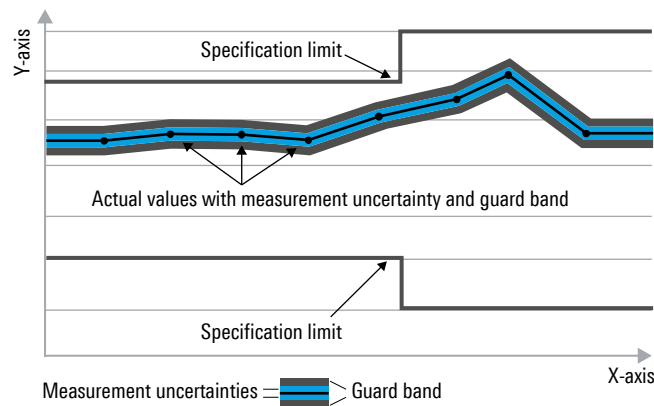

## Non-traceable specifications with limits (n. trc.)

Represent product performance that is specified and tested as described under “Specifications with limits” above. However, product performance in this case cannot be warranted due to the lack of measuring equipment traceable to national metrology standards. In this case, measurements are referenced to standards used in the Rohde & Schwarz laboratories.

## Specifications without limits

Represent warranted product performance for the specified parameter. These specifications are not specially marked and represent values with no or negligible deviations from the given value, e.g. dimensions or resolution of a setting parameter. Compliance is ensured by design.

## Typical data (typ.)

Characterizes product performance by means of representative information for the given parameter. When marked with  $<$ ,  $>$  or as a range, it represents the performance met by approximately 80 % of the instruments at production time. Otherwise, it represents the mean value.

## Nominal values (nom.)

Characterize product performance by means of a representative value for the given parameter, e.g. nominal impedance. In contrast to typical data, a statistical evaluation does not take place and the parameter is not tested during production.

## Measured values (meas.)

Characterize expected product performance by means of measurement results gained from individual samples.

## Uncertainties

Represent limits of measurement uncertainty for a given measurand. Uncertainty is defined with a coverage factor of 2 and has been calculated in line with the rules of the Guide to the Expression of Uncertainty in Measurement (GUM), taking into account environmental conditions, aging, wear and tear.

Device settings and GUI parameters are designated with the format “parameter: value”.

Non-traceable specifications with limits, typical data as well as nominal and measured values are not warranted by Rohde & Schwarz.

In line with the 3GPP standard, chip rates are specified in million chips per second (Mcps), whereas bit rates and symbol rates are specified in billion bit per second (Gbps), million bit per second (Mbps), thousand bit per second (kbps), million symbols per second (MSPS) or thousand symbols per second (ksps), and sample rates are specified in million samples per second (Msample/s). Gbps, Mcps, Mbps, MSPS, kbps, ksps and Msample/s are not SI units.

## General information

The R&S®SzM frequency multipliers are available for the following frequency bands:

- 50 GHz to 75 GHz (R&S®SzM75)
- 60 GHz to 90 GHz (R&S®SzM90)
- 75 GHz to 110 GHz (R&S®SzM110)
- 90 GHz to 140 GHz (R&S®SzM140)
- 110 GHz to 170 GHz (R&S®SzM170)

The R&S®SzM frequency multipliers include the following accessories:

- External DC power supply
- User manual
- Hex ball driver 3/32
- USB cable
- Waveguide flange screws and dowel pins (4 × UNC4-40 7.6; 4 × UNC4-40 9.24; 2 × IEEE dowel pins)
- USB flash drive with setting values for micrometer screw (if R&S®SzM is equipped with mechanically controlled attenuator)

The R&S®SzM frequency multipliers can be equipped with the following options:

	Mechanically controlled attenuator <sup>1</sup>	Electronically controlled attenuator <sup>1,2,3</sup>	High output power <sup>3</sup>	Isolator	Waveguide-to-waveguide adapter (test port adapter)
R&S®SzM75	•	•	•	•	•
R&S®SzM90	•	•	•	•	•
R&S®SzM110	•	•	–	•	•
R&S®SzM140	•	–	–	•	•
R&S®SzM170	•	–	–	•	•

• = installed, – = not installed

The R&S®SzM can be conveniently controlled via USB with an R&S®SMA100B, R&S®SMB100B, R&S®SMW200A or R&S®SMM100A signal generator. The frequency options installed on these signal generators must cover the entire R&S®SzM input frequency range. The R&S®SMxx-K554 option must be installed on the signal generator to control the R&S®SzM via USB. The combination operates as a single unit and lets users directly enter the desired frequency and the target level at the R&S®SzM output with a mechanically or electronically controlled attenuator.

<sup>1</sup> Either a mechanically or an electronically controlled attenuator can be installed.

<sup>2</sup> The electronically controlled attenuator can be installed once or twice.

<sup>3</sup> If the high power option is installed, the electronically controlled attenuator can be installed only once.

# Specifications

## RF performance

### Frequency

Output frequency range	R&S®SzM75	50 GHz to 75 GHz	
	R&S®SzM90	60 GHz to 90 GHz	
	R&S®SzM110	75 GHz to 110 GHz	
	R&S®SzM140	90 GHz to 140 GHz	
	R&S®SzM170	110 GHz to 170 GHz	
Input frequency range and multiplication factor	R&S®SzM75	12.50 GHz to 18.75 GHz	× 4
	R&S®SzM90	15.00 GHz to 22.50 GHz	× 4
	R&S®SzM110	18.75 GHz to 27.50 GHz	× 4
	R&S®SzM140	15.00 GHz to 23.33 GHz	× 6
	R&S®SzM170	13.75 GHz to 21.25 GHz	× 8
Waveguide designator	R&S®SzM75	WR15	
	R&S®SzM90	WR12	
	R&S®SzM110	WM-2540 (WR10)	
	R&S®SzM140	WM-2032 (WR8)	
	R&S®SzM170	WM-1651 (WR6.5)	
Connector type (anti cocking flange)	R&S®SzM75	Rohde & Schwarz precision waveguide flange (compatible with UG-387/U-M and IEEE 1785.2)	
	R&S®SzM90		
	R&S®SzM110		
	R&S®SzM140		
	R&S®SzM170		

## Level

Output				
R&S®SzM75 <sup>4</sup>	with R&S®SzM-B75I/-B75T options			
	–	–	–	> 9 dBm
	-B75H	–	–	> 20 dBm
	-B75H	-B75M	–	> 20 dBm
	-B75H	–	-B75E	> 18 dBm
	–	-B75M	–	> 9 dBm
	–	–	-B75E	> 7 dBm
–	–	2 × -B75E	> 5 dBm	
R&S®SzM90 <sup>5</sup>	with R&S®SzM-B90I/-B90T options			
	–	–	–	> 10 dBm
	-B90H	–	–	> 17 dBm
	-B90H	-B90M	–	> 17 dBm
	-B90H	–	-B90E	> 16 dBm
	–	-B90M	–	> 10 dBm
	–	–	-B90E	> 9 dBm
–	–	2 × -B90E	> 7 dBm	
R&S®SzM110 <sup>6</sup>	with R&S®SzM-B110I/-B110T options			
	75 GHz to ≤ 90 GHz	–	–	> 14 dBm
	> 90 GHz to 110 GHz	–	–	> 12 dBm
	75 GHz to ≤ 90 GHz	–	-B110M	> 14 dBm
	> 90 GHz to 110 GHz	–	–	> 12 dBm
	75 GHz to ≤ 90 GHz	–	–	> 12 dBm
	> 90 GHz to 110 GHz	–	-B110E	> 10 dBm
75 GHz to ≤ 90 GHz	–	–	> 10 dBm	
> 90 GHz to 110 GHz	–	–	> 8 dBm	
R&S®SzM140 <sup>7</sup>	with R&S®SzM-B140I/-B140T options			
	–	–	–	> 8 dBm
	–	-B140M	–	> 7 dBm
R&S®SzM170 <sup>8</sup>	with R&S®SzM-B170I/-B170T options			
	–	–	–	> 6 dBm
	–	-B170M	–	> 6 dBm

Maximum attenuation of mechanically controlled attenuator	R&S®SzM75 with R&S®SzM-B75M	40 dB
	R&S®SzM90 with R&S®SzM-B90M	40 dB
	R&S®SzM110 with R&S®SzM-B110M	40 dB
	R&S®SzM140 with R&S®SzM-B140M	40 dB
	R&S®SzM170 with R&S®SzM-B170M	40 dB
Maximum attenuation of electronically controlled attenuator	R&S®SzM75 with R&S®SzM-B75E <sup>9</sup>	15 dB or 30 dB
	R&S®SzM90 with R&S®SzM-B90E <sup>9</sup>	15 dB or 30 dB
	R&S®SzM110 with R&S®SzM-B110E <sup>9</sup>	15 dB or 30 dB
Level uncertainty	Specifications are measured with 7 dBm input power, specified level range depends on instrument configuration.	
	> -5 dBm	< 2 dB, < 1.5 dB (typ.)
	-5 dBm to > -25 dBm	< 2.5 dB (typ.)

Input		
Input power level for specified output power level		+6.7 dBm to +7.3 dBm
Input power damage level		> +10 dBm
Input connector type		2.92 mm, female

<sup>4</sup> Output power is reduced with R&S®SzM-B75T by 0.2 dB (typ.) and with R&S®SzM-B75I by 0.8 dB (typ.).

<sup>5</sup> Output power is reduced with R&S®SzM-B90T by 0.2 dB (typ.) and with R&S®SzM-B90I by 1 dB (typ.).

<sup>6</sup> Output power is reduced with R&S®SzM-B110T by 0.2 dB (typ.) and with R&S®SzM-B110I by 1 dB (typ.).

<sup>7</sup> Output power is reduced with R&S®SzM-B140T by 0.3 dB (typ.) and with R&S®SzM-B140I by 1.3 dB (typ.).

<sup>8</sup> Output power is reduced with R&S®SzM-B170T by 0.4 dB (typ.) and with R&S®SzM-B170I by 1.5 dB (typ.).

<sup>9</sup> The electronically controlled attenuator can be installed once or twice. If the high power option is installed, the electronically controlled attenuator can be installed only once.


## VSWR

RF port		
R&S®SzM75	with R&S®SzM-B75I	< 1.5 (typ.)
R&S®SzM90	with R&S®SzM-B90I	
R&S®SzM110	with R&S®SzM-B110I	
R&S®SzM140	with R&S®SzM-B140I	
R&S®SzM170	with R&S®SzM-B170I	


## Spectral purity

Subharmonics (in-band)		
R&S®SzM75	50 GHz to < 51 GHz	< -18 dBc (typ.)
	51 GHz to 75 GHz	< -25 dBc (typ.)
R&S®SzM90	60 GHz to < 61 GHz	< -10 dBc (typ.)
	61 GHz to < 65 GHz	< -20 dBc (typ.)
	65 GHz to 90 GHz	< -25 dBc (typ.)
R&S®SzM110		< -25 dBc (typ.)
R&S®SzM140	90 GHz to 100 GHz	< -12 dBc (typ.)
	> 100 GHz to < 135 GHz	< -20 dBc (typ.)
	135 GHz to 140 GHz	< -12 dBc (typ.)
R&S®SzM170	110 GHz to 118 GHz	< -10 dBc (typ.)
	> 118 GHz to 125 GHz	< -15 dBc (typ.)
	> 125 GHz to 168 GHz	< -30 dBc (typ.)
	> 168 GHz to 170 GHz	< -20 dBc (typ.)


## Output power plots

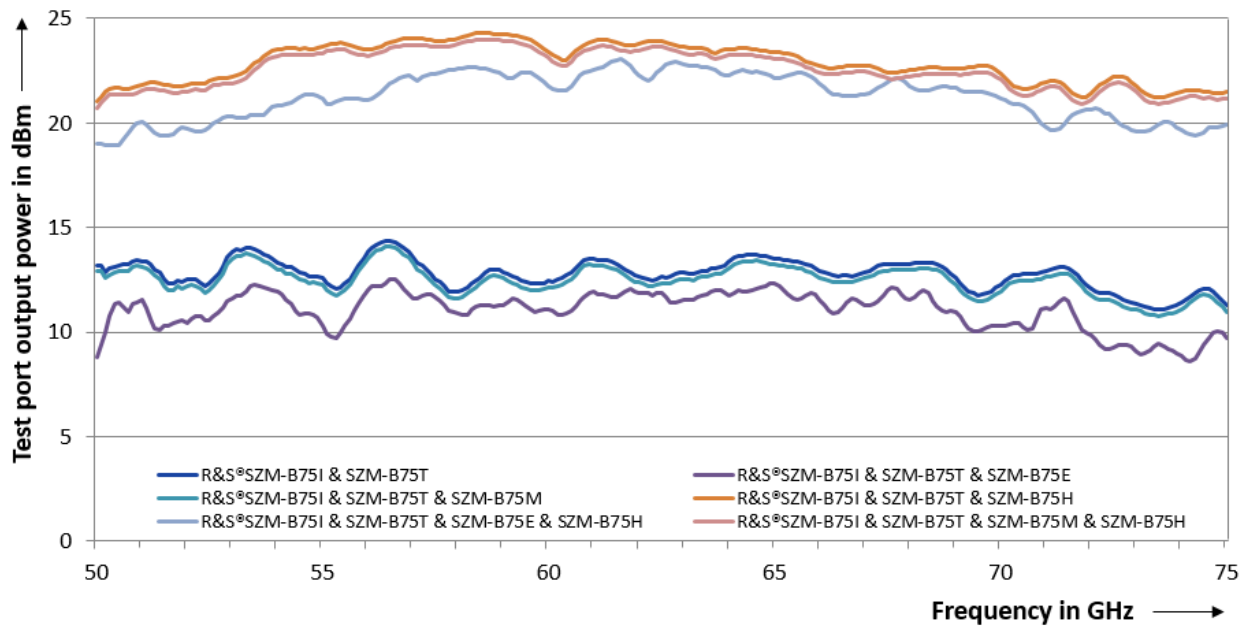


Typical output power of the R&S S75

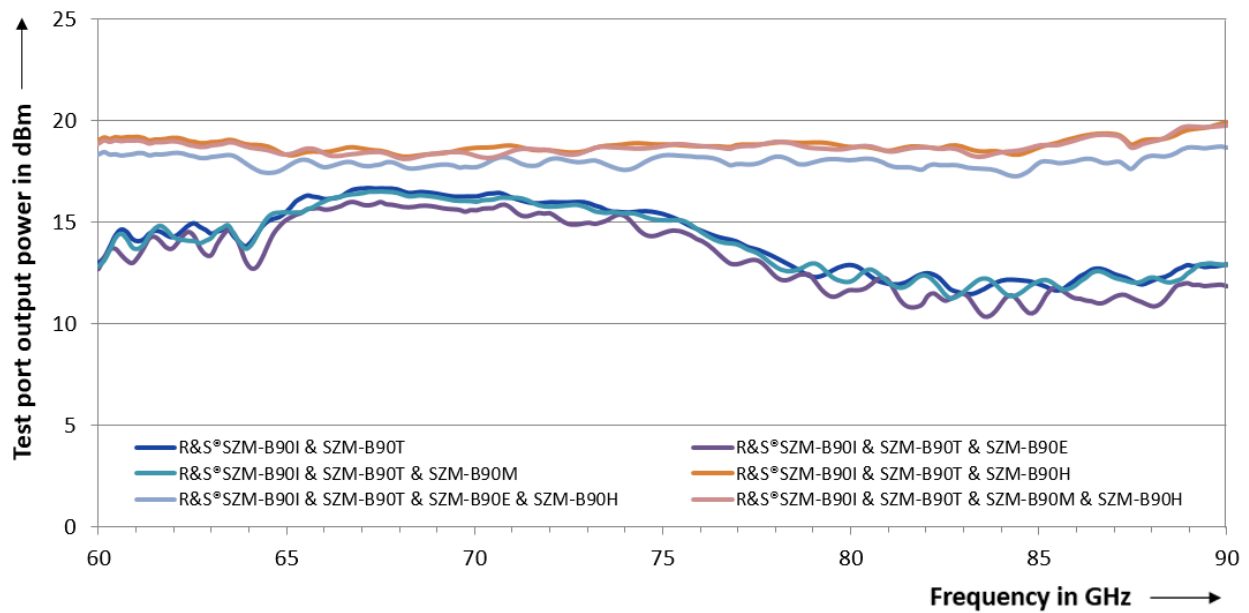


Typical output power of the R&S S90

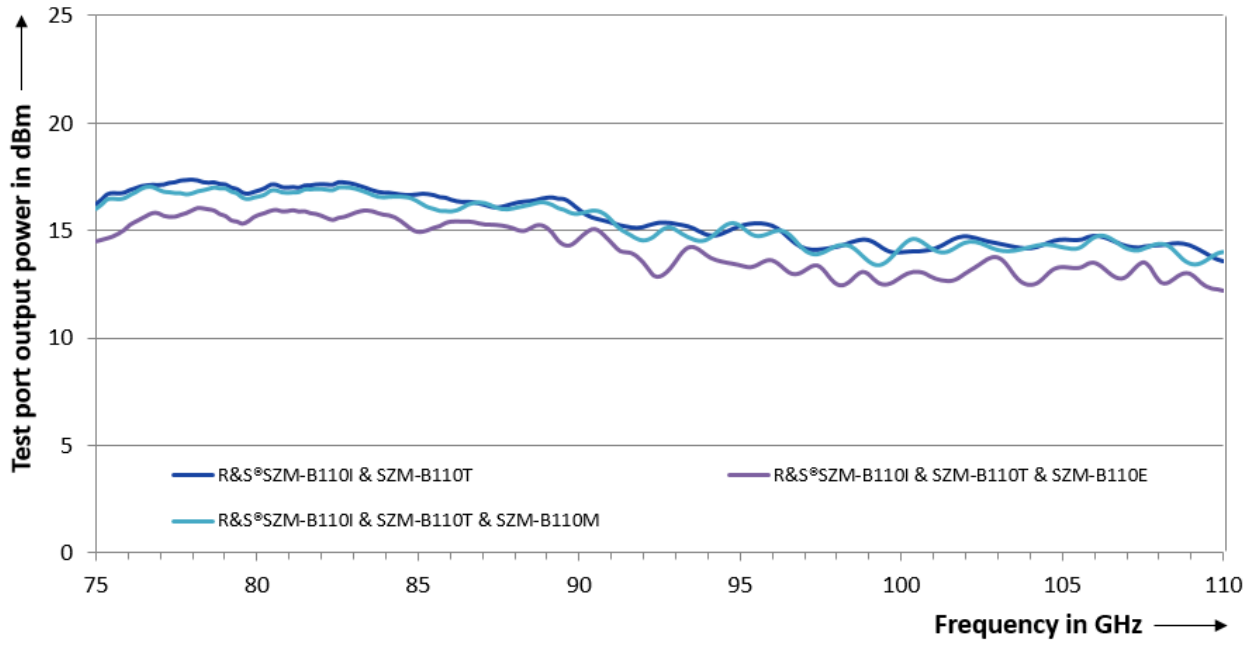

Typical output power of the R&S S110

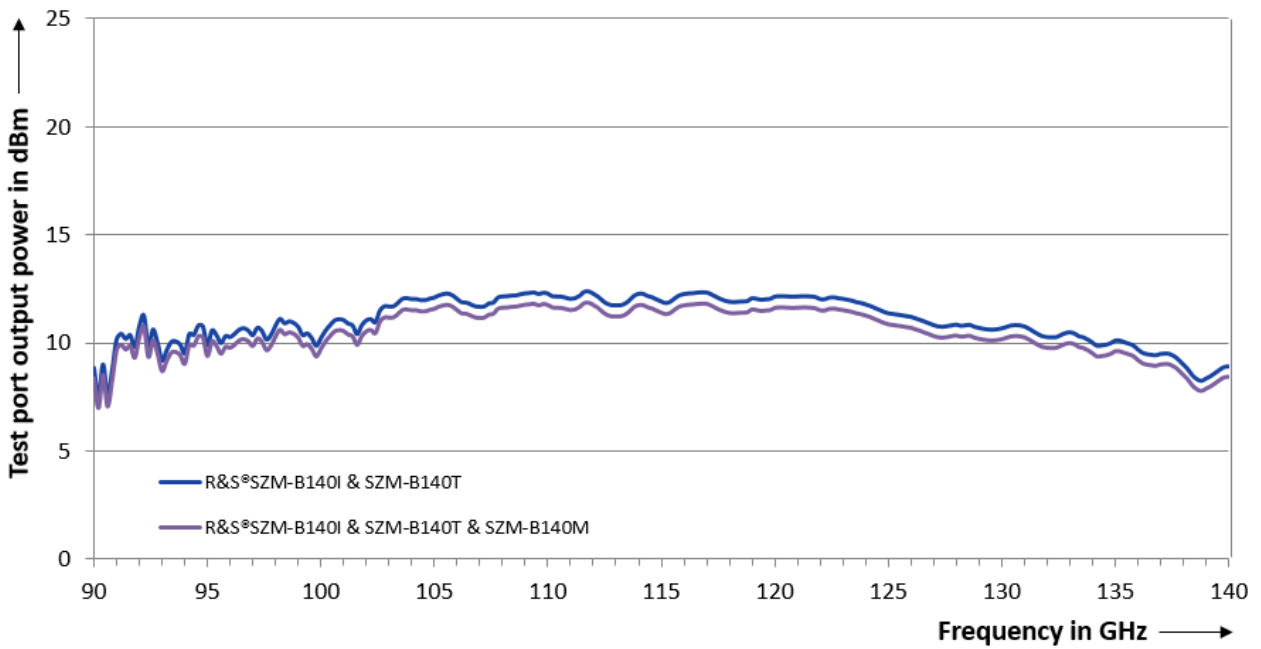

Typical output power of the R&S S140

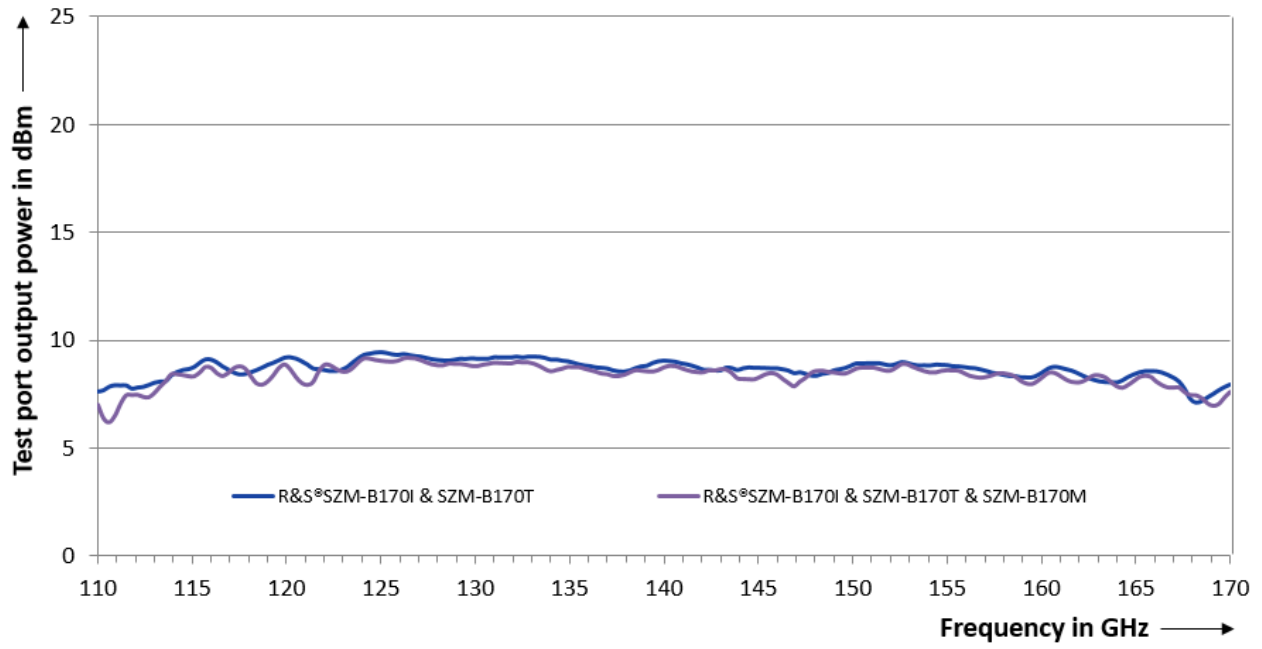

Typical output power of the R&S®SZM170

## General data

<b>DC power adapter</b>		
AC input voltage range		100 V to 240 V ( $\pm 10\%$ )
AC supply frequency		50 Hz to 60 Hz ( $-6\%/+5\%$ )
Connector type		DC barrel (m)
Power consumption	R&S®SZM75	10 W
	R&S®SZM90	10 W
	R&S®SZM110	10 W
	R&S®SZM140	6 W
	R&S®SZM170	12 W
<b>USB</b>		universal serial bus (USB), type B
<b>Electromagnetic compatibility (EMC)</b>	EU: in line with EMC Directive 2014/30EC	applied harmonized standards: <ul style="list-style-type: none"> <li>EN 61326-1 (industrial environment)</li> <li>EN 55011 (class 1)</li> </ul>
<b>Mechanical resistance</b>		
Vibration	sinusoidal	5 Hz to 55 Hz, 0.15 mm amplitude const., 55 Hz to 150 Hz, 0.5 g const., in line with EN 60068-2-6
	random	8 Hz to 500 Hz, acceleration: 1.2 g RMS, in line with EN 60068-2-64
Shock		40 g shock spectrum, in line with MIL-STD-810, method 516, procedure I
Restriction of the use of hazardous substances in electrical and electronic equipment	EU: in line with RoHS Directive 2011/65/EC	applied harmonized standard: EN IEC 63000
<b>Environmental conditions</b>		
Temperature range	specified temperature range	+18 °C to +28 °C
	with R&S®SZM-B75E/-B90E/-B110E	+23 °C to +28 °C
	operating temperature range	+5 °C to +40 °C
	storage temperature range	-40 °C to +70 °C
Operation	permissible altitude	
	R&S®SZM	3000 m above sea level
	power supply	2000 m above sea level
<b>Calibration interval</b>		
Recommended calibration interval	operation 40 h/week in the full range of the specified environmental conditions	3 years
<b>Dimensions and weight</b>		
Chassis dimensions (W × H × D)	without feet and feet-mount, without test port adapter (TPA)	90 mm × 60 mm × 180 mm (3.54 in × 2.36 in × 7.09 in)
Full dimensions (W × H × D)	with feet and feet-mount, with waveguide	130 mm × 73 mm × 195 mm (5.12 in × 2.87 in × 7.68 in)
Number of feet		4
Feet height	user-adjustable	12.1 mm to 18.1 mm (0.48 in to 0.71 in)
Weight		2 kg (5 lb)
Shipping weight		5 kg (11 lb)

## Ordering information

Designation	Type	Order No.
<b>Base unit</b>		
Frequency multiplier, 50 GHz to 75 GHz	R&S®SzM75	1443.5004.02
Frequency multiplier, 60 GHz to 90 GHz	R&S®SzM90	1443.5104.02
Frequency multiplier, 75 GHz to 110 GHz	R&S®SzM110	1443.5204.02
Frequency multiplier, 90 GHz to 140 GHz	R&S®SzM140	1443.5304.02
Frequency multiplier, 110 GHz to 170 GHz	R&S®SzM170	1443.5404.02
Including DC power supply, user manual, USB cable, USB flash drive with setting values for micrometer screw (if R&S®SzM is equipped with mechanically controlled attenuator), hex ball driver 3/32, 4 × UNC4-40 7.6, 4 × UNC 4-40 9.24, 2 × IEEE dowel pins		
<b>Hardware options</b>		
<b>R&amp;S®SzM75</b>		
Mechanically controlled attenuator	R&S®SzM-B75M	1443.5027.02
Electronically controlled attenuator	R&S®SzM-B75E	1443.5010.02
High output power	R&S®SzM-B75H	1443.5056.02
Isolator	R&S®SzM-B75I	1443.5040.02
Test port adapter, 40 mm	R&S®SzM-B75T	1443.5033.02
<b>R&amp;S®SzM90</b>		
Mechanically controlled attenuator	R&S®SzM-B90M	1443.5127.02
Electronically controlled attenuator	R&S®SzM-B90E	1443.5110.02
High output power	R&S®SzM-B90H	1443.5156.02
Isolator	R&S®SzM-B90I	1443.5140.02
Test port adapter, 40 mm	R&S®SzM-B90T	1443.5133.02
<b>R&amp;S®SzM110</b>		
Mechanically controlled attenuator	R&S®SzM-B110M	1443.5227.02
Electronically controlled attenuator	R&S®SzM-B110E	1443.5210.02
Isolator	R&S®SzM-B110I	1443.5240.02
Test port adapter, 40 mm	R&S®SzM-B110T	1443.5233.02
<b>R&amp;S®SzM140</b>		
Mechanically controlled attenuator	R&S®SzM-B140M	1443.5327.02
Isolator	R&S®SzM-B140I	1443.5340.02
Test port adapter, 40 mm	R&S®SzM-B140T	1443.5333.02
<b>R&amp;S®SzM170</b>		
Mechanically controlled attenuator	R&S®SzM-B170M	1443.5427.02
Isolator	R&S®SzM-B170I	1443.5440.02
Test port adapter, 40 mm	R&S®SzM-B170T	1443.5433.02
<b>Recommended extras</b>		
R&S®SzM control via USB by the analog R&S®SMA100B microwave signal generator	R&S®SMAB-K554	1420.9884.02
R&S®SzM control via USB by the analog R&S®SMB100B microwave signal generator	R&S®SMBB-K554	1422.6253.02
R&S®SzM control via USB by the R&S®SMW200A vector signal generator	R&S®SMW-K554	1413.7309.02
R&S®SzM control via USB by the R&S®SMM100A vector signal generator	R&S®SMM-K554	1441.1001.02
Torque wrench, for waveguide flange screws	R&S®ZV-Z1000	1314.5467.02
Angled wrench, for waveguide flange screws	R&S®ZCAW	1175.1960.00
Angled torque wrench, for waveguide flange screws	R&S®ZCTW	1175.2014.02
Hex ball driver 3/32		1307.8670.00
Coaxial cable with K connectors, 50 Ω, length: 1.0 m		1348.3850.00

## Warranty and service

<b>Warranty</b>		
Base unit		1 year
All other items		1 year
<b>Service options</b>		
	<b>Service plans</b>	<b>On demand</b>
Calibration	up to five years <sup>10</sup>	pay per calibration
Accredited calibration	up to five years <sup>10</sup>	pay per accredited calibration
Warranty and repair	up to five years <sup>10</sup>	standard price repair
Contact your Rohde & Schwarz sales office for further details.		

---

<sup>10</sup> For extended periods, contact your Rohde & Schwarz sales office.





**Service at Rohde & Schwarz**  
**You're in great hands**

- ▶ Worldwide
- ▶ Local and personalized
- ▶ Customized and flexible
- ▶ Uncompromising quality
- ▶ Long-term dependability

**Rohde & Schwarz**

The Rohde&Schwarz technology group is among the trailblazers when it comes to paving the way for a safer and connected world with its leading solutions in test & measurement, technology systems and networks & cybersecurity. Founded more than 90 years ago, the group is a reliable partner for industry and government customers around the globe. The independent company is headquartered in Munich, Germany and has an extensive sales and service network with locations in more than 70 countries.

[www.rohde-schwarz.com](http://www.rohde-schwarz.com)

**Sustainable product design**

- ▶ Environmental compatibility and eco-footprint
- ▶ Energy efficiency and low emissions
- ▶ Longevity and optimized total cost of ownership

Certified Quality Management

**ISO 9001**

Certified Environmental Management

**ISO 14001**

**More Rohde & Schwarz certificates**



**Rohde & Schwarz training**

[www.training.rohde-schwarz.com](http://www.training.rohde-schwarz.com)

**Rohde & Schwarz customer support**

[www.rohde-schwarz.com/support](http://www.rohde-schwarz.com/support)

