

R&S® HA-Z24E

External Preamplifier

1 GHz to 85 GHz

Specifications



Definitions


General

Product data applies under the following conditions:

- Three hours storage at ambient temperature followed by 30 minutes warm-up operation in ON state
- Specified environmental conditions met
- Recommended calibration interval adhered to
- All internal automatic adjustments performed, if applicable

Specifications with limits

Represent warranted product performance by means of a range of values for the specified parameter. These specifications are marked with limiting symbols such as $<$, \leq , $>$, \geq , \pm , or descriptions such as maximum, limit of, minimum. Compliance is ensured by testing or is derived from the design. Test limits are narrowed by guard bands to take into account measurement uncertainties, drift and aging, if applicable.

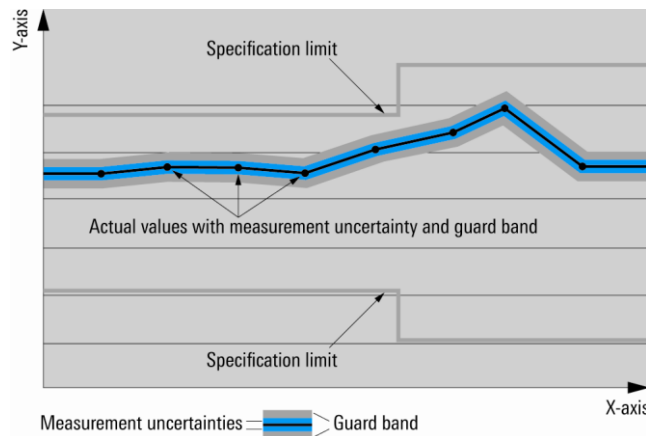

Specifications without limits

Represent warranted product performance for the specified parameter. These specifications are not specially marked and represent values with no or negligible deviations from the given value (e.g. dimensions or resolution of a setting parameter). Compliance is ensured by design.

Typical data (typ.)

Characterizes product performance by means of representative information for the given parameter. When marked with $<$, $>$ or as a range, it represents the performance met by approximately 80 % of the instruments at production time. Otherwise, it represents the mean value.

Nominal values (nom.)

Characterize product performance by means of a representative value for the given parameter (e.g. nominal impedance). In contrast to typical data, a statistical evaluation does not take place and the parameter is not tested during production.

Measured values (meas.)

Characterize expected product performance by means of measurement results gained from individual samples.

Uncertainties


Represent limits of measurement uncertainty for a given measurand. Uncertainty is defined with a coverage factor of 2 and has been calculated in line with the rules of the Guide to the Expression of Uncertainty in Measurement (GUM), taking into account environmental conditions, aging, wear and tear.

Device settings and GUI parameters are indicated as follows: "parameter: value".

Typical data as well as nominal and measured values are not warranted by Rohde & Schwarz.

Specifications


RF frequency range		1 GHz to 85 GHz ¹
Maximum input level	CW RF power	-10 dBm
	DC voltage	25 V
1 dB compression point		-8 dBm (nom.)
Small signal gain	at room temperature ²	
	1 GHz ≤ f < 2 GHz	≥ +17 dB, typ. 20 dB
	2 GHz ≤ f < 24 GHz	≥ +20 dB, typ. 23 dB
	24 GHz ≤ f < 73 GHz	≥ +18 dB, typ. 22 dB
	73 GHz ≤ f < 80 GHz	≥ +17 dB, typ. 21 dB
	80 GHz ≤ f ≤ 85 GHz	≥ +10 dB, typ. 14 dB
Small signal gain uncertainty	at room temperature ²	
	1 GHz ≤ f ≤ 20 GHz	± 0.6 dB
	20 GHz < f ≤ 40 GHz	± 0.7 dB
	40 GHz < f ≤ 67 GHz	± 0.9 dB
	67 GHz < f ≤ 80 GHz	± 1.1 dB
	80 GHz < f ≤ 85 GHz	± 1.3 dB
Temperature coefficient of gain	referenced to small signal gain at room temperature ² , +20 °C to +30 °C	
	1 GHz ≤ f ≤ 20 GHz	- 0.03 dB/K (meas.)
	20 GHz < f ≤ 40 GHz	- 0.05 dB/K (meas.)
	40 GHz < f ≤ 67 GHz	- 0.11 dB/K (meas.)
	67 GHz < f ≤ 80 GHz	- 0.12 dB/K (meas.)
	80 GHz < f ≤ 85 GHz	- 0.22 dB/K (meas.)
Noise figure at room temperature ²	3 GHz ≤ f < 25 GHz	≤ 7 dB (meas.)
	25 GHz ≤ f < 40 GHz	≤ 9 dB (meas.)
	40 GHz ≤ f < 67 GHz	≤ 14 dB (meas.)

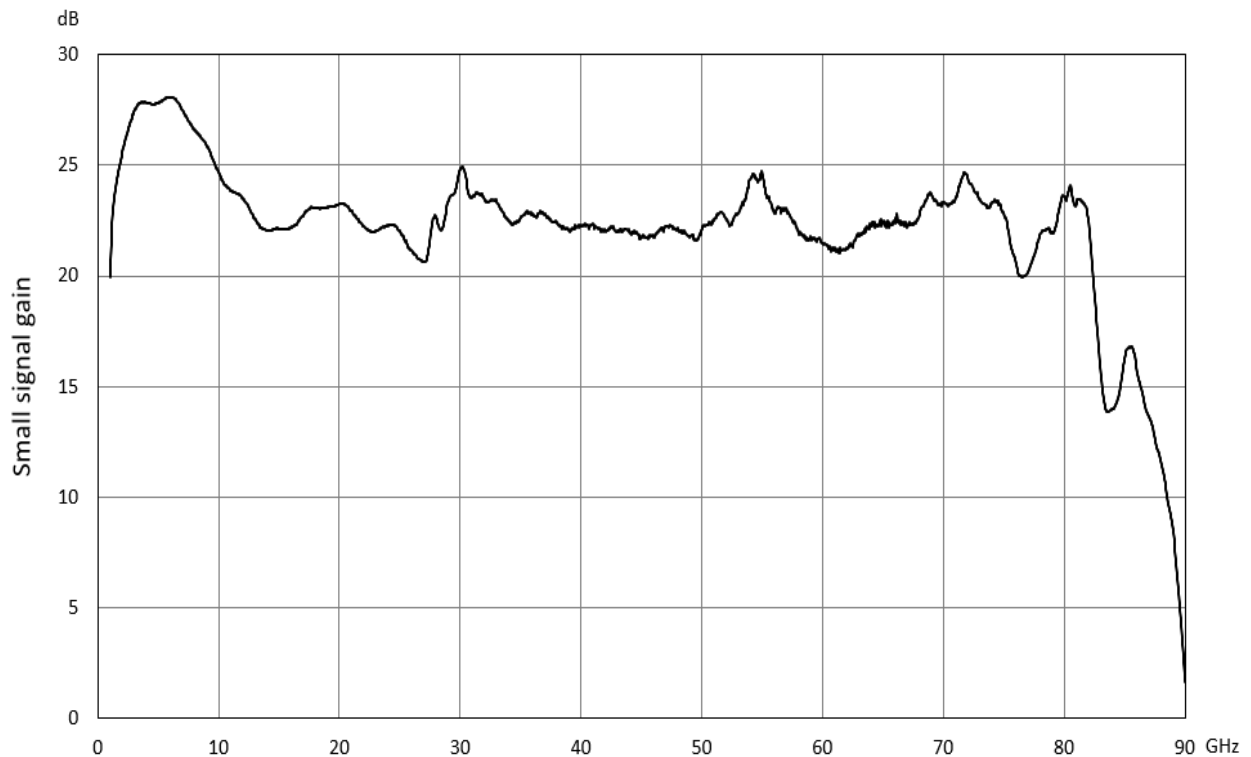

Typical small signal gain of the R&S®HA-Z24E at room temperature.

¹ The useable frequency range is from 10 MHz to 90 GHz. For this frequency range correction values are stored in the preamplifier EEPROM.

² Room temperature = 23 °C.

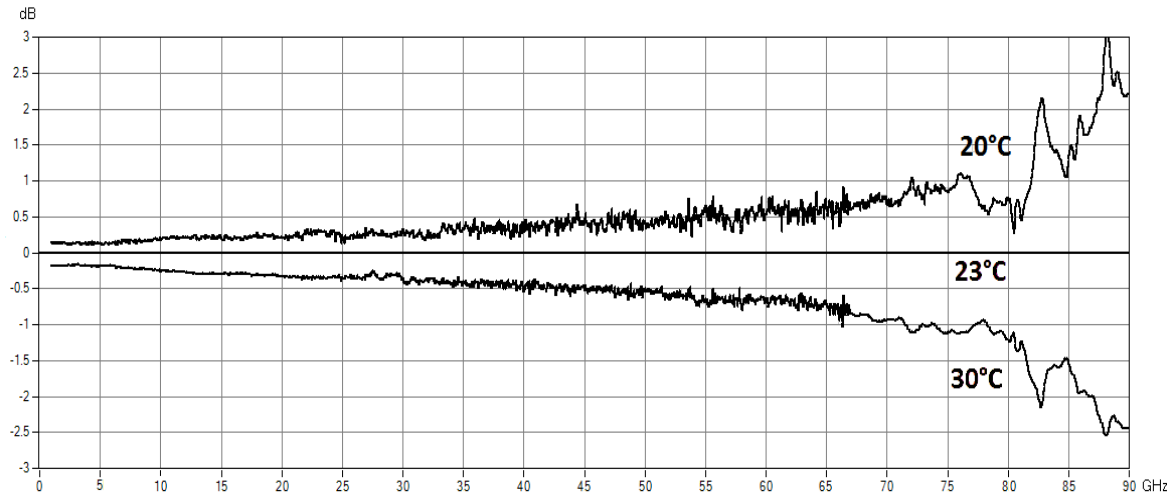

Typical small signal gain variation of the R&S®HA-Z24E at different temperatures.

Inputs and outputs

RF input		
Connector		1 mm (f)
Impedance		50 Ω
Maximum input level	CW RF power	-10 dBm
	DC voltage	25 V
Return loss	2 GHz ≤ f < 3 GHz	≤ -4 dB
	3 GHz ≤ f < 25 GHz	≤ -8 dB
	25 GHz ≤ f < 65 GHz	≤ -7 dB
	65 GHz ≤ f < 80 GHz	≤ -6 dB
	80 GHz ≤ f ≤ 85 GHz	≤ -5 dB (meas.)

RF output		
Connector		1 mm (f)
Impedance		50 Ω
Maximum reverse DC voltage		25 V
Return loss		≤ -5 dB (meas.)

Power supply / control interface		
Connector	for power supply and control interface	5-pin LEMOSA female
DC supply voltage		+5 V
Max. input current		600 mA (nom.)
Control interface		supports high speed and full speed modes according to USB version 2.0

General data

Temperature		
Operating temperature range		+5 °C to +40 °C
Storage temperature range		-40 °C to +70 °C
Climatic loading		+40 °C at 90 % relative humidity, in line with EN 60068-2-30, without condensation

Dimensions & weight		
Dimensions	W × H × D	96.0 mm × 46.0 mm × 67.0 mm (3.76 in × 1.55 in × 2.18 in)
Weight		280 g (nom.), 0.45 lb (nom.)

Warranty		1 year
-----------------	--	--------

Recommended calibration interval		1 year
---	--	--------

Ordering information

Designation	Type	Order No.
External Preamplifier, 1 GHz to 85 GHz	R&S®HA-Z24E	1331.6539.85
Accessories supplied	RF cable 1 mm (f) to 1 mm (m), DC to 110 GHz, flexible, phase stable, 150 mm length, USB interface cable, getting started user manual, carrying case	

Recommended extras

Designation	Type	Order No.
Coaxial adapter 1 mm (m) – 1 mm (m)		1314.9256.00
Spare RF cable, 50 Ohm, 1 mm (f) – 1 mm (m), DC to 110 GHz, flexible, phase stable, 150 mm length	R&S®ZV-Z198	1306.4565.06
Torque Wrench for 1.0 mm connectors, 0.45 Nm coupling torque (for R&S®FSW85)	R&S®ZN-ZTW	1328.8534.10

Service that adds value

- | Worldwide
- | Local and personalized
- | Customized and flexible
- | Uncompromising quality
- | Long-term dependability

Rohde & Schwarz

The Rohde & Schwarz electronics group offers innovative solutions in the following business fields: test and measurement, broadcast and media, secure communications, cybersecurity, monitoring and network testing. Founded more than 80 years ago, the independent company which is headquartered in Munich, Germany, has an extensive sales and service network with locations in more than 70 countries.

Sustainable product design

- | Environmental compatibility and eco-footprint
- | Energy efficiency and low emissions
- | Longevity and optimized total cost of ownership

Certified Quality Management

ISO 9001

Certified Environmental Management

ISO 14001

Rohde & Schwarz GmbH & Co. KG

www.rohde-schwarz.com

Rohde & Schwarz training

www.training.rohde-schwarz.com

Regional contact

- | Europe, Africa, Middle East | +49 89 4129 12345
customersupport@rohde-schwarz.com
- | North America | 1 888 TEST RSA (1 888 837 87 72)
customer.support@rsa.rohde-schwarz.com
- | Latin America | +1 410 910 79 88
customersupport.la@rohde-schwarz.com
- | Asia Pacific | +65 65 13 04 88
customersupport.asia@rohde-schwarz.com
- | China | +86 800 810 82 28 | +86 400 650 58 96
customersupport.china@rohde-schwarz.com

R&S® is a registered trademark of Rohde & Schwarz GmbH & Co. KG

Trade names are trademarks of the owners

PD 5215.3079.22 | Version 01.01 | September 2017 (we)

R&S®HA-Z24E External Pre-amplifier 1 GHz to 85 GHz

Data without tolerance limits is not binding | Subject to change

© 2017 Rohde & Schwarz GmbH & Co. KG | 81671 Munich, Germany



5215307922