

# R&S® RT-ZP05S

## Probe

## User Manual



1179512402

Version 02

**ROHDE & SCHWARZ**

Make ideas real



This document describes the following R&S®RT-ZP05S models:

- R&S®RT-ZP05S (1333.2401.02)

© 2022 Rohde & Schwarz GmbH & Co. KG

Mühlhofstr. 15, 81671 München, Germany

Phone: +49 89 41 29 - 0

Email: [info@rohde-schwarz.com](mailto:info@rohde-schwarz.com)

Internet: [www.rohde-schwarz.com](http://www.rohde-schwarz.com)

Subject to change – data without tolerance limits is not binding.

R&S® is a registered trademark of Rohde & Schwarz GmbH & Co. KG.

Trade names are trademarks of the owners.

1179.5124.02 | Version 02 | R&S®RT-ZP05S

Throughout this manual, products from Rohde & Schwarz are indicated without the ® symbol, e.g. R&S®RT-ZP05S is indicated as R&S RT-ZP05S.

# 1 Safety and regulatory information

The product documentation helps you use the R&S RT-ZP05S safely and efficiently. Follow the instructions provided here and throughout the manual.

Use the product only for its intended use and within its performance limits. If the probe assembly is used in a manner not specified by the manufacturer, the protection provided by it may be impaired.

## Operating site

Only use the product indoors, and keep it dry. The product has no casing and is sensitive to moisture and humidity.

Do not use the probe in explosive atmospheres.

The product is suitable for pollution degree 2 environments where nonconductive contamination can occur. Occasionally a temporary conductivity that is caused by condensation must be expected. Temporary condensation occurs only when the product is out of service.

## Using the probe

Take the following measures for your safety:

- If any part of the product is damaged or broken, stop using the product. Check the probe cable regularly for wear. Touching a worn cable during measurements can cause injuries.
- Before connecting the probe to a circuit under test, make sure that the probe is connected to a grounded measurement instrument.
- Do not connect a probe to any voltage that exceeds the maximum permissible input voltage specified in the data sheet.
- Do not use the probe for measurements on mains circuit.
- The probe is not rated for any measurement category. Do not use the probes in circuits with measurement category II, III or IV.
- With increasing frequency, the voltage on the probe tip should not be higher than illustrated in the derating curve.
- Always connect the probe lead to earth ground.

## Declaration of Conformity

The manufacturer declares the conformity of this product with the actual required safety standards in accordance with the Low Voltage Directive IEC 61010-031 Safety requirements for electrical equipment for measurement, control and laboratory use.

Part 031: Safety requirements for hand-held probe assemblies for electrical measurement and test

## Measurement Categories

IEC 61010-2-030 defines measurement categories that rate instruments on their ability to resist short transient overvoltages that occur in addition to the working voltage. Use the measurement instrument and accessories only in electrical environments for which they are rated.

- 0 - Instruments without rated measurement category  
For measurements performed on circuits not directly connected to mains, for example, electronics, circuits powered by batteries, and specially protected secondary circuits. This measurement category is also known as CAT I.
- CAT II:  
For measurements performed on circuits directly connected to the low-voltage installation by a standard socket outlet, for example, household appliances and portable tools.
- CAT III:  
For measurements performed in the building installation, such as junction boxes, circuit breakers, distribution boards, and equipment with permanent connection to the fixed installation.
- CAT IV:  
For measurements performed at the source of the low-voltage installation, such as electricity meters and primary overcurrent protection devices.

## Disposal



This electronic product is classified within the WEEE/ RoHS category list as monitoring and control equipment (category 9). Category 9 products are exempted from the restrictions under the scope of the RoHS directive.



Rohde & Schwarz has developed a disposal concept for the ecofriendly disposal or recycling of waste material. Rohde & Schwarz fully assumes its obligation as a producer to take back and dispose of electrical and electronic waste. Contact your local service representative to dispose of the product.

## EC Directives

- WEEE Directive 2002/96/EC - Waste Electrical and Electronic Equipment
- RoHS Directive 2002/95/EC - Restriction of the use of certain Hazardous Substances in Electrical and Electronic Equipment

## Meaning of safety labels

Safety labels on the product warn against potential hazards.

	<p>Potential hazard Read the product documentation to avoid personal injury or product damage.</p>
	<p>Electrical hazard Indicates live parts. Risk of electric shock, fire, personal injury or even death.</p>

## 2 Specifications

**Table 2-1: Electrical specifications**


Attenuation ratio	10 : 1
Bandwidth	500 MHz (meas.), -3 dB
Rise time	0.7 ns (meas.)
Input impedance	10 MΩ    10 pF (meas.)
Input voltage	max. 300 V <sub>RMS</sub> (450 V transient overvoltage)

**Table 2-2: Miscellaneous**

Temperature range	0 °C to 40 °C
Relative humidity	max. 80%, without condensation
Altitude	max. 2000 m
Pollution degree	2
Cable length	ca. 1.30 m


### Derating

The input impedance of the probe decreases as the frequency of the applied signal increases.

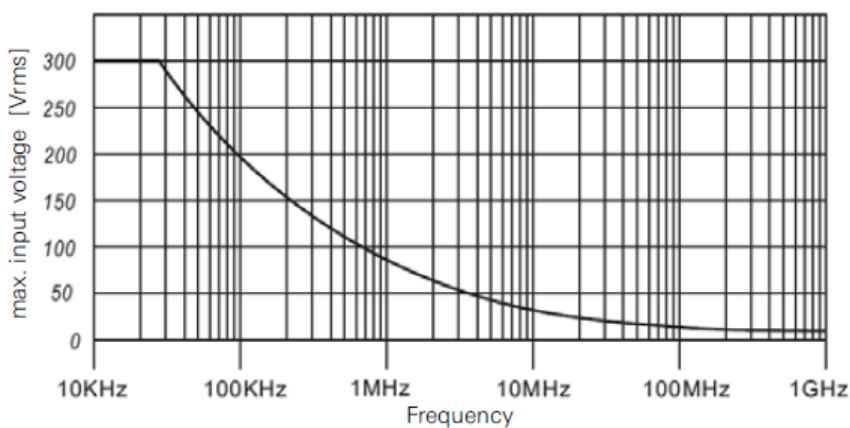

**Figure 2-1: Derating curve**

## Included in delivery

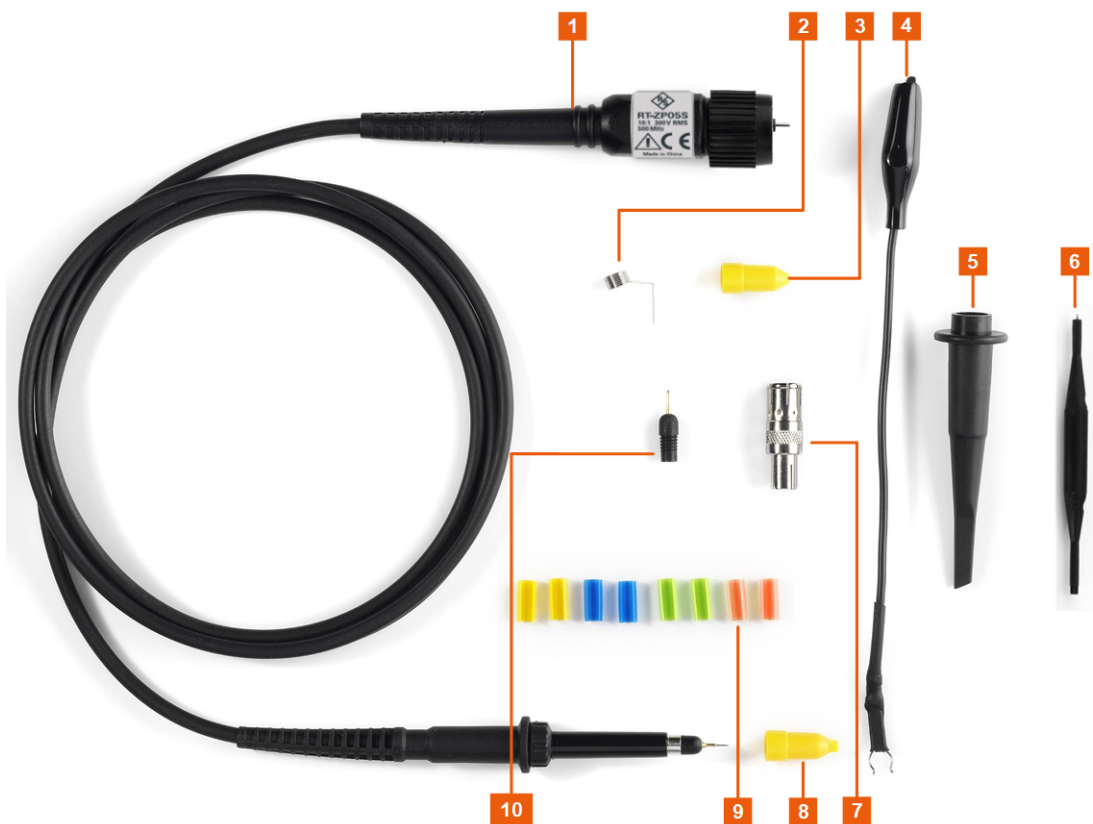

**Figure 2-2: Parts included in delivery**

- 1 = Probe
- 2 = Ground clip
- 3 = Protection cap
- 4 = Ground lead
- 5 = Retractable hook
- 6 = Adjustment tool
- 7 = BNC adapter
- 8 = IC Insulating cap
- 9 = Identification tags
- 10 = Additional probe tip

## 3 Adjustment


The probe can be adjusted for low (LF) and high frequency compensation (HF).



*Figure 3-1: LF compensation trimmer*

### LF adjustment

1. Connect the probe to a 1 kHz square wave signal.
2. Adjust LF compensation trimmer T1 for optimum square wave response.

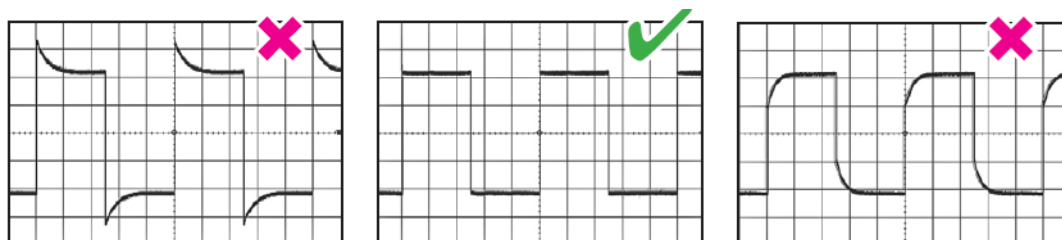

*Figure 3-2: LF adjustment with 1 kHz signal*



## 4 Maintenance

### 4.1 Cleaning

1. Clean the outside of the product using a soft cloth moistened with either distilled water or isopropyl alcohol. Keep in mind that the casing is not waterproof.

**Note:** Do not use cleaning agents. Solvents (thinners, acetone), acids and bases can damage the labeling or plastic parts.

2. Dry the product completely before using it.