

R&S®RTC1000

versus Keysight 1000X


High sensitivity, multifunctionality and a great price.

From embedded developers to service technicians to educators – the wide range of functions address a broad group of users. State-of-the-art, high-performance technology in an extremely silent design meets the high requirements of today's customers. These digital oscilloscopes include a wide range of upgrade options, providing true investment protection for the future.

Your benefit	Features
See small signals often hidden in the noise	High sensitivity and low noise means you'll be able to zoom in and see signals that are often hidden in the noise of other scopes.
Easily access data on the R&S®RTC1000	Multiple connectivity options make it easy to document results and pull data off the scope, via LAN or USB. MTP functionality allows the scope to act like a drive mounted on your PC to easily extract data and screenshots.
Standard functionality	Many standard features mean you get more capability for your investment.

Bandwidth Comparison

Available bandwidth up to 300 MHz allows the R&S®RTC1000 to grow to meet your future needs.




► For more information, see www.rohde-schwarz.com/catalog/RTC1000




Parameter	R&S®RTC1000	Keysight 1000X
Acquisition system		
Bandwidth (MHz)	50, 70, 100, 200, 300 upgradable	50, 70, 100 upgradable
2 channels / 4 channels	2 channels	2 channels
Max. sampling rate / memory	2 Gsample/s 2 Msample	1 Gsample/s EDU; 2 Gsample/s DSO 100 ksample EDU; 1 Msample DSO
Waveform update rate	10 000 waveforms/s	50 000 waveforms/s
Hardware input sensitivity	1 mV/div to 10 V/div	1 mV/div to 10 V/div
Multifunction		
Protocol	I ² C, SPI, UART/RS-232/RS-422/RS-485, CAN, LIN	I ² C, SPI, UART/RS-232, CAN, LIN
Frequency analysis	128k points	64k points
Mixed signal (MSO)	8 channels, upgradable 0.5 Gsample/s, 0.5 Msample	1 channel, standard
DVM	standard	standard
Component tester	standard	not available
Waveform generator	optional (-B6)	not available
Pattern generator	optional (-B6)	optional (G model)
Frequency response analyzer	not available	optional (G model)
Form factor		
Display	6.5" / 640 x 480	7" / 800 x 480
Interfaces	standard USB device/host; standard LAN (fast Web browser) MTP	standard USB device/host;
Audible noise	28.3 dB(A)	not specified


QuickView gives you the most important results at the push of a button

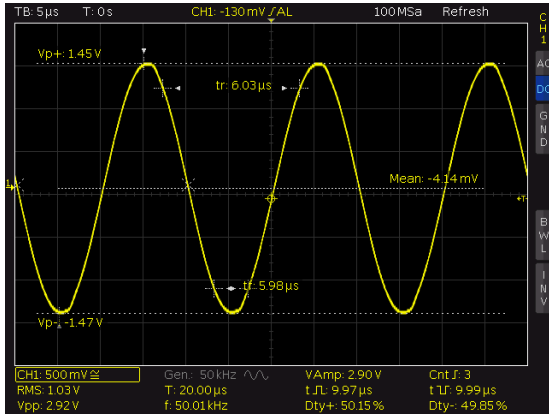

The integrated waveform generator outputs arbitrary waveforms and 4-bit signal patterns

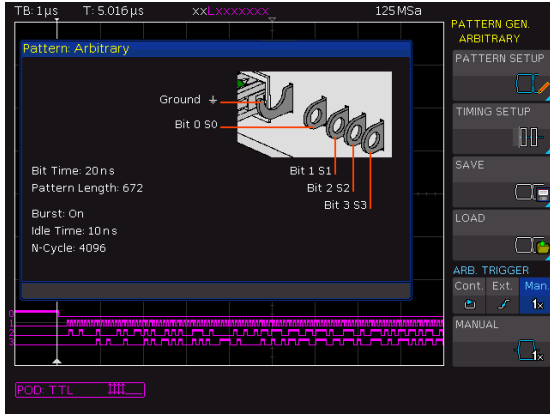

The integrated component tester helps you quickly assess faulty components

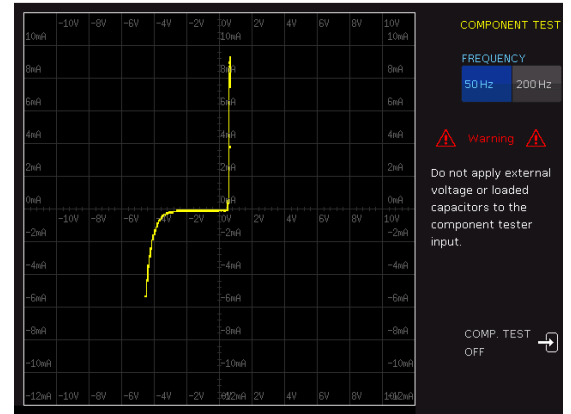

X-in-1 functionality

R&S®RTC1000											
Keysight 1000X											

Advantages of R&S®RTC1000 over Keysight 1000X

2 times more memory	8 times more digital channels	3 times faster boot time
----------------------------	--------------------------------------	---------------------------------