


R&S® VoIP SERVER

Specifications

Specifications

Supported VoIP clients	TopSec Phone apps	iOS, Android, Windows 7 (PC), Windows Mobile (each in latest version)
	TopSec Office Gateway	R&S®VoIP SERVER software version 3.1.0 or later
	R&S®IP-GATE	R&S®VoIP SERVER software version 3.2.0 or later
VoIP server peering	with R&S®VoIP SERVER	R&S®VoIP SERVER software version 3.1.0 or later
VoIP protocols		IAX2, SIP/RTP
Number of users that can be registered	R&S®VoIP SERVER Medium	50
	R&S®VoIP SERVER Large	1000
Number of possible simultaneous calls	R&S®VoIP SERVER Medium	25
	R&S®VoIP SERVER Large	40
Integrated cryptography	voice encryption	none; calls are not decrypted in the R&S®VoIP SERVER
	connection to configuration PC	HTTPS with TLS 1.2
Firewall	port-based	integrated
CPU		Intel Atom dual-core processor
Ports	each 10M/100M/1000M Ethernet	1 × WAN, 1 × Config
	front panel	2 × USB
Controls on front panel		power button, reset button, LEDs
Power supply		90 V to 264 V AC, 250 W
Power consumption		min. approx. 14.5 W, max. approx. 18 W
Dimensions	W × H × D, without rackmounts	445 mm × 42.5 mm × 220 mm (17.5 in × 1.7 in × 8.7 in)
Weight		4.0 kg ± 0.5 kg (8.8 lb ± 1.1 lb)

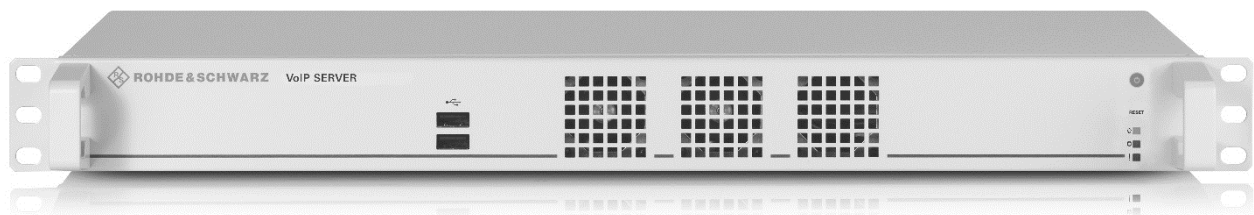

You act. We protect.
Encryption and IT security
by Rohde & Schwarz SIT.

Ordering information

Type	Order No.
R&S®VoIP SERVER Medium	5414.6201.03
R&S®VoIP SERVER Large	5414.6201.02
R&S®VoIP SERVER Upgrade	5415.9185.02
Equipment supplied: R&S®VoIP SERVER, power cable (length: 1.80 m), quick reference guide (German/English)	

Rohde & Schwarz SIT GmbH
Am Studio 3
12489 Berlin, Germany
Phone: +49 30 658 84 223
Fax: +49 30 658 84 183
info.sit@rohde-schwarz.com
www.sit.rohde-schwarz.com



R&S® is a registered trademark of Rohde & Schwarz GmbH & Co. KG
Trade names are trademarks of the owners | Subject to change
PD 3607.1159.22 | Version 01.00 | November 2014 (ch)
R&S®VoIP SERVER
© 2014 Rohde & Schwarz GmbH & Co.KG | 81671 Munich, Germany