



R&S®NPA

versus Yokogawa WT310E



Comprehensive power analysis in a compact package

Accurately testing standby power consumption is a challenge. The R&S®NPA power analyzer is a compact AC/DC load and standby current characterization tester that enables measurements in line with all common standards without needing additional computers or remote infrastructure.


Your benefit	Features
Adapt the user experience to your needs	<ul style="list-style-type: none"> ▶ Simultaneous display of up to 10 numerical measurement functions ▶ User configurable measurement display ▶ Graphical display modes for inrush, harmonic analysis, waveform and trend chart
Accurately measure to key compliance requirements	<ul style="list-style-type: none"> ▶ Basic accuracy: 0.05 % ▶ 100 kHz bandwidth at a sampling rate of 500 ksample /s ▶ Simultaneous display of current and voltage, each with 16 bit resolution
Integrated tools simplify measurements	<ul style="list-style-type: none"> ▶ 26 different measurement and mathematical functions ▶ Limit testing with pass/fail indication for up to six selectable limits ▶ Save logging and screenshots directly to your USB device

Parameter	R&S®NPA	Yokogawa WT310E
Inputs, voltage	5 V to 600 V (CF3) 2.5 V to 300 V (CF6) 1800 V (peak)	15 V to 600 V (CF3) 7.5 V to 300 V (CF6) 1500 V (peak)
Inputs, current	5 mA to 20 A (CF3) 2.5 mA to 10 A (CF6) 60 A (peak)	5 mA to 20 A (CF3) 2.5 mA to 10 A (CF6) 100 A (peak)
Crest factor	switchable (1/3/6)	switchable (3/6)
Power accuracy	0.05 % of reading + 0.05 % of range	0.1 % of reading + 0.2 % of range
Bandwidth	100 kHz	100 kHz
Sampling rate	500 ksamples/s	100 ksamples/s
Voltage input impedance	2 MΩ/20 pF	2 MΩ/13 pF
Current input impedance	10 mΩ/0.5 Ω	6 mΩ to 16 mΩ/0.5Ω
Advanced I/O (model R&S®NPA501/701)	sensor input, analog I/O, digital I/O	sensor input, analog I/O (optional)
Standard testing (model R&S®NPA701)	in-device testing (EN50564, EN61000 3 2, IEC62301)	only via PC software
Remote control	USB, LAN, IEEE-488/ GPIB (R&S®NPAxxx-G models)	IEEE-488 / GPIB), USB, LAN (optional)
Dimensions (W x H x D)	222 mm x 97 mm x 291 mm	213 mm x 88 mm x 379 mm
Weight	3 kg	3 kg




For more information, visit
www.rohde-schwarz.com/product/NPA

Waveform: view load with phase-angle control

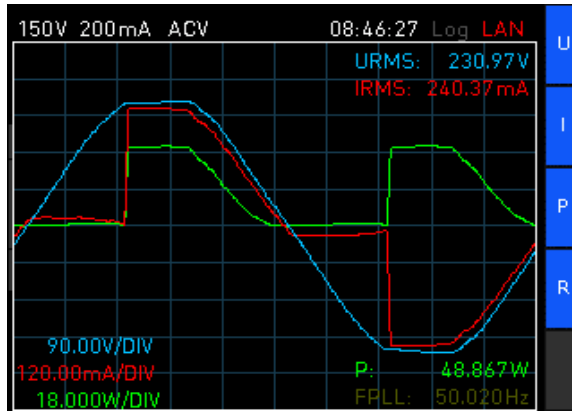

Waveform view quickly shows qualitative insights

Analysis: harmonics breakdown

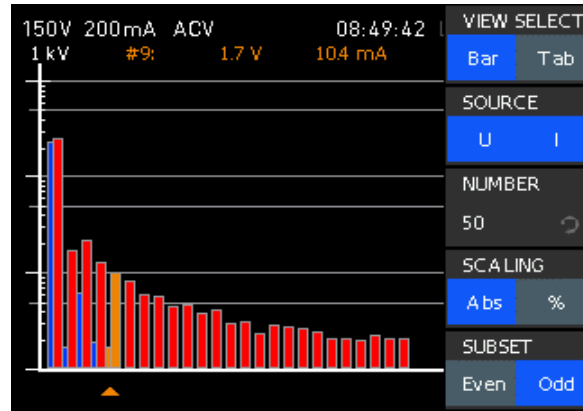


Intuitive 50 harmonics analysis simplifies understanding of measurements

Safe connection to the R&S®NPA-Zxx adapters




The DUT is simply and safely plugged into the R&S®NPA through the optional R&S®NPA-Zxx mains adapter. Country specific adapter models are available for connection in different countries.

Numerical: precision at your fingertips

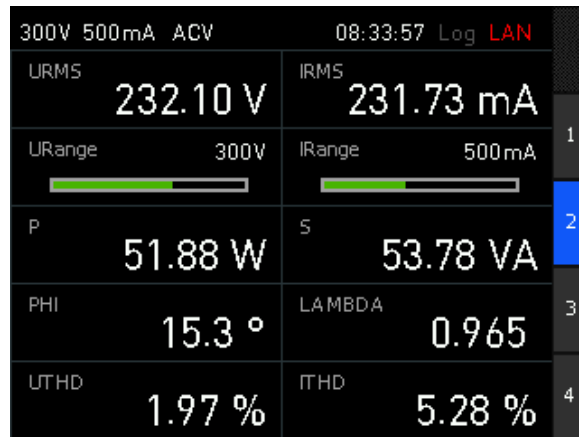

Numerical display enables quick quantitative insights

Trend: see what's happening

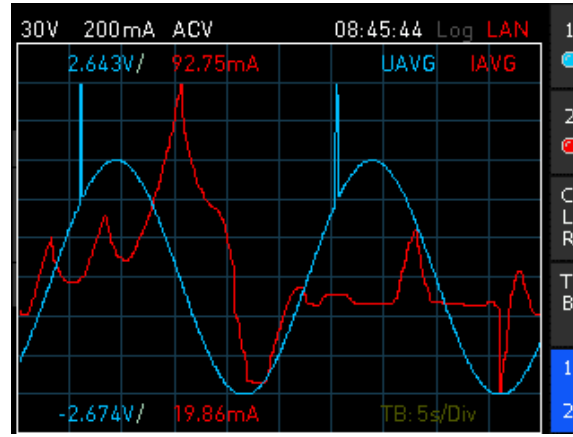


The trend chart summarizes the measurements over time

Modern graphical display



Yokogawa WT310:
seven segment LED and only four are value configurable



R&S®NPA:
color TFT with measurement parameters freely configurable