


3GPP TD-SCDMA BS/UE Measurement Applications Specifications

R&S®FSV-K76/-K77
R&S®FPS-K76/-K77

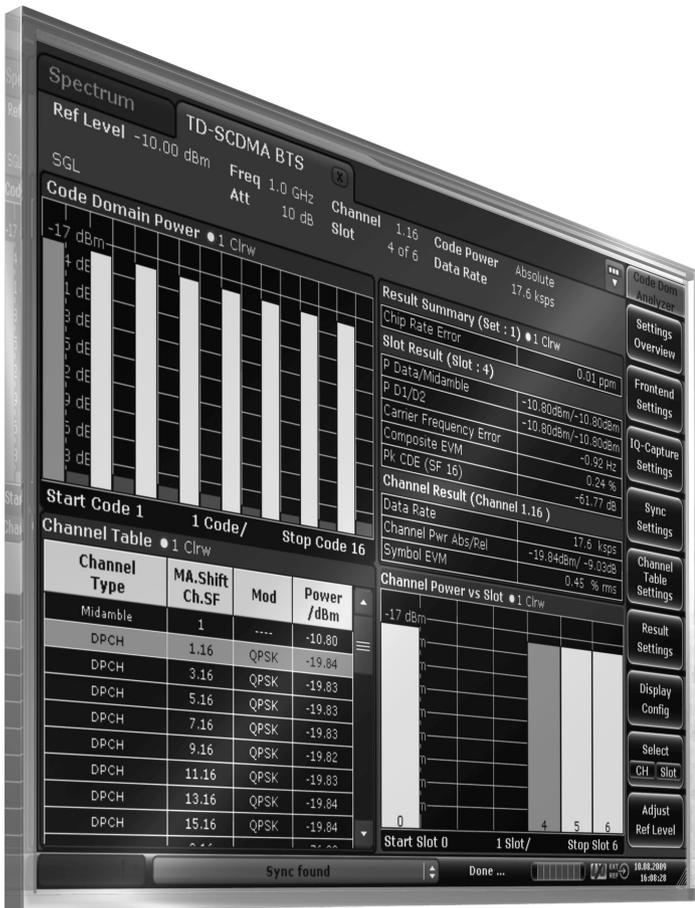

CONTENTS

Definitions	3
Specifications.....	4
Overview	4
Frequency	4
Level.....	4
Signal acquisition.....	4
Measurement parameters.....	4
Result diagrams.....	5
Measurement specification (nominal).....	6
<i>R&S®FSV-K76/R&S®FPS-K76</i>	6
<i>R&S®FSV-K77/R&S®FPS-K77</i>	6
Ordering information	7

Definitions


General

Product data applies under the following conditions:

- Three hours storage at ambient temperature followed by 30 minutes warm-up operation
- Specified environmental conditions met
- Recommended calibration interval adhered to
- All internal automatic adjustments performed, if applicable

Specifications with limits

Represent warranted product performance by means of a range of values for the specified parameter. These specifications are marked with limiting symbols such as $<$, \leq , $>$, \geq , \pm , or descriptions such as maximum, limit of, minimum. Compliance is ensured by testing or is derived from the design. Test limits are narrowed by guard bands to take into account measurement uncertainties, drift and aging, if applicable.

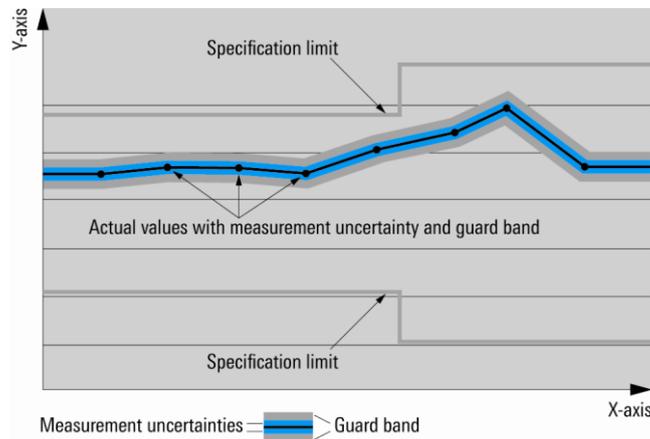

Specifications without limits

Represent warranted product performance for the specified parameter. These specifications are not specially marked and represent values with no or negligible deviations from the given value (e.g. dimensions or resolution of a setting parameter). Compliance is ensured by design.

Typical data (typ.)

Characterizes product performance by means of representative information for the given parameter. When marked with $<$, $>$ or as a range, it represents the performance met by approximately 80 % of the instruments at production time. Otherwise, it represents the mean value.

Nominal values (nom.)

Characterize product performance by means of a representative value for the given parameter (e.g. nominal impedance). In contrast to typical data, a statistical evaluation does not take place and the parameter is not tested during production.

Measured values (meas.)

Characterize expected product performance by means of measurement results gained from individual samples.

Uncertainties

Represent limits of measurement uncertainty for a given measurand. Uncertainty is defined with a coverage factor of 2 and has been calculated in line with the rules of the Guide to the Expression of Uncertainty in Measurement (GUM), taking into account environmental conditions, aging, wear and tear.

Device settings and GUI parameters are designated with the format "parameter: value".

Typical data as well as nominal and measured values are not warranted by Rohde & Schwarz.

Specifications

The specifications apply to the following measurement applications:

- R&S®FSV-K76 TD-SCDMA BS (DL)
- R&S®FPS-K76 TD-SCDMA BS (DL)
- R&S®FSV-K77 TD-SCDMA UE (UL)
- R&S®FPS-K77 TD-SCDMA UE (UL)

They are based on the R&S®FPS, R&S®FSV and R&S®FSVA signal and spectrum analyzer data sheet specifications and have not been checked separately and are not verified during instrument calibration. Measurement uncertainties are given as 95 % confidence intervals. The specified level measurement errors do not take into account systematic errors due to reduced signal-to-noise ratio (S/N).

Overview

	R&S®FSV	R&S®FSVA	R&S®FPS
R&S®FSV-K76 (base station)	•	•	–
R&S®FSV-K77 (user equipment)	•	•	–
R&S®FPS-K76 (base station)	–	–	•
R&S®FPS-K77 (user equipment)	–	–	•

Frequency

Frequency range	RF input	same as for R&S®FSV/R&S®FSVA/R&S®FPS ¹
-----------------	----------	---

Level

Level range	RF input	–60 dBm to +30 dBm ¹
-------------	----------	---------------------------------

Signal acquisition

Supported standards		3GPP TDD 1.28 Mcps option release 8
Capture length	R&S®FSV-K76/ R&S®FSV-K77	up to 126000 slots
	R&S®FPS-K76/ R&S®FPS-K77	up to 283500 slots
Sweep time	spectrum mask, ACLR (adjacent channel leakage power ratio)	max. 16000 s, auto
Sweep count		1 to 32767
Trigger modes	code domain analysis	free run
		external
	RF measurements	IF power (R&S®FSV-K77/R&S®FPS-K77 only) free run, external, IF power, RF power, time, power sensor
Time synchronization in code domain analysis	R&S®FSV-K76/R&S®FPS-K76	based on DwPTS
	R&S®FSV-K77/R&S®FPS-K77	based on first detected uplink slot

Measurement parameters

Link mode	R&S®FSV-K76/R&S®FPS-K76	downlink (DL)
	R&S®FSV-K77/R&S®FPS-K77	uplink (UL)
Scrambling code		0 to 127
Maximum number of users (K_{cell})		2, 4, 6, 8, 10, 12, 14, 16
Phase synchronization	R&S®FSV-K76/R&S®FPS-K76	P-CCPCH
		midamble of selected slot
	R&S®FSV-K77/R&S®FPS-K77	code channel of selected slot midamble of selected slot

¹ Restricted IF overload, IF power trigger and auto level functionality depending on carrier frequency and bandwidth at carrier frequencies < 50 MHz.

Channel table search mode		predefined and autosearch. The predefined channel table allows configuring the complete channel setup for the code domain analyzer.
Normalize I/Q offset		on/off
Inactive channel power threshold	channel table auto search	-100 dB to 0 dB, relative to total data power
Maximum data modulation	channel table auto search	QPSK, 8PSK, 16QAM, 64QAM
Spectrum emission mask	standard	in line with standard
	user defined	The spectrum emission mask is measured in line with either the manual user setting or a user specified XML file.

Result diagrams

Result summary	general results	chip rate error, trigger to frame
	results for selected slot	data power, midamble power, averaged relative code domain error, number of active channels, carrier frequency error, I/Q imbalance, I/Q offset, ρ , composite EVM, peak code domain error
	results for selected channel	absolute power, relative power, symbol EVM, data rate, modulation type
Code domain power	clear/write, max. hold, min. hold, average, view	code domain power versus channel (relative to total power and absolute)
Code domain error power	clear/write, max. hold, min. hold, average, view	code domain error power versus channel
Peak code domain error	clear/write, max. hold, min. hold, average, view	peak code domain error power versus slot
Channel power versus slot	clear/write, max. hold, min. hold, average, view	power versus slot for selected channel (relative to total power and absolute)
Channel table	clear/write, max. hold, min. hold, average, view	numeric result table for all midambles and channels including the following readings: channel type, channel number, spreading factor, data rate, modulation type, absolute power, relative power, midamble shift, midamble to data power ratio
Composite EVM	clear/write, max. hold, min. hold, average, view	EVM versus slot
EVM versus symbol	clear/write, max. hold, min. hold, average, view	EVM versus symbol for selected channel and slot
Power versus symbol	clear/write, max. hold, min. hold, average, view	power versus symbol for selected channel and slot
Channel bit stream	clear/write, view	bit stream for selected channel and slot
Channel constellation	clear/write, view	constellation diagram for selected channel and slot
Composite constellation	clear/write, view	constellation diagram for composite signal
Output power	clear/write, max. hold, min. hold, average, view, blank	integrated signal power over channel bandwidth
Adjacent channel power, multicarrier adjacent channel power	clear/write, max. hold, min. hold, average, view, blank	absolute and relative adjacent channel power
Spectrum emission mask	clear/write, max. hold, min. hold, average, view, blank	spectrum mask limit check, peak list evaluation
Occupied bandwidth	clear/write, max. hold, min. hold, average, view, blank	occupied bandwidth measured in frequency domain
Power versus time	clear/write, max. hold, min. hold, average, view, blank	transmit on/off time mask limit check
CCDF	clear/write, view, blank	complementary cumulative distribution function

Measurement specification (nominal)

Specifications apply under the following conditions: temperature range from +20 °C to +30 °C; signal level ≥ -25 dBm; properly adjusted reference level; center frequency between 700 MHz and 2.7 GHz; external reference frequency applied.

R&S®FSV-K76/R&S®FPS-K76

Valid for 10 active DPCH, SF 16, modulation type QPSK.

Code domain power		
Level uncertainty, absolute	see R&S®FSV/R&S®FSVA/R&S®FPS level uncertainty	
Level uncertainty, relative	$P_{\text{total}} > -20$ dBm	< 0.1 dB
Peak code domain error		
Measurement range	AWGN channel	-50 dB to -25 dB
Residual PCDE		< -50 dB
Composite EVM		
Measurement range	AWGN channel	0.6 % to 20 %
Residual EVM		< 0.6 %
Frequency error		
Measurement range	sync to midamble	± 14 kHz
Measurement uncertainty	3 Hz + reference frequency uncertainty (see R&S®FSV/ R&S®FSVA/R&S®FPS frequency uncertainty)	
Occupied bandwidth		
Measurement uncertainty	99 % power bandwidth, span 4.8 MHz	< 14 kHz
Spectrum emission mask		
Dynamic range ($P_{\text{total}} > -20$ dBm) ²		> 76 dB
Adjacent channel leakage ratio		
Dynamic range ($P_{\text{total}} > -20$ dBm) ³	with noise correction on	> 74 dB

R&S®FSV-K77/R&S®FPS-K77

Valid for 1 active DPCH, SF 16 in slot 1, modulation type QPSK

Code domain power		
Level uncertainty, absolute	see R&S®FSV/R&S®FSVA/R&S®FPS level uncertainty	
Level uncertainty, relative	$P_{\text{total}} > -20$ dBm	< 0.1 dB
Peak code domain error		
Measurement range	AWGN channel	-50 dB to -25 dB
Residual PCDE		< -50 dB
Composite EVM		
Measurement range	AWGN channel	0.6 % to 20 %
Residual EVM		< 0.6 %
Frequency error		
Measurement range	sync to midamble	± 14 kHz
Measurement uncertainty	3 Hz + Δf_{ref} (see R&S®FSV/ R&S®FSVA/R&S®FPS frequency uncertainty)	
Occupied bandwidth		
Measurement uncertainty	99 % power bandwidth, span 4.8 MHz	< 14 kHz
Spectrum emission mask		
Dynamic range ($P_{\text{total}} > -20$ dBm) ²		> 76 dB
Adjacent channel leakage ratio		
Dynamic range ($P_{\text{total}} > -20$ dBm) ³		> 74 dB

² The specified dynamic range is the ratio of the channel power to the power at an offset of 815 kHz, measured with 30 kHz integration bandwidth.

³ The specified dynamic range is the ratio of the channel power to the power at an offset of 1.6 MHz, measured with 1.28 MHz integration bandwidth.

Ordering information

Designation	Type	Order No.
TD-SCDMA BS (DL) Measurements	R&S®FSV-K76	1310.8603.02
TD-SCDMA UE (UL) Measurements	R&S®FSV-K77	1310.8655.02
3GPP TD-SCDMA BS Measurement Application	R&S®FPS-K76	1321.4379.02
3GPP TD-SCDMA UE Measurement Application	R&S®FPS-K77	1321.4385.02
R&S®FSV		
Signal and Spectrum Analyzer	R&S®FSV4	1321.3008.04
Signal and Spectrum Analyzer	R&S®FSV7	1321.3008.07
Signal and Spectrum Analyzer	R&S®FSV13	1321.3008.13
Signal and Spectrum Analyzer	R&S®FSV30	1321.3008.30
Signal and Spectrum Analyzer ⁴	R&S®FSV40	1321.3008.39
Signal and Spectrum Analyzer	R&S®FSV40	1321.3008.40
R&S®FSVA		
Signal and Spectrum Analyzer	R&S®FSVA4	1321.3008.05
Signal and Spectrum Analyzer	R&S®FSVA7	1321.3008.08
Signal and Spectrum Analyzer	R&S®FSVA13	1321.3008.14
Signal and Spectrum Analyzer	R&S®FSVA30	1321.3008.31
Signal and Spectrum Analyzer ⁴	R&S®FSVA40	1321.3008.41
R&S®FPS		
Signal and Spectrum Analyzer	R&S®FPS4	1319.2008.04
Signal and Spectrum Analyzer	R&S®FPS7	1319.2008.07
Signal and Spectrum Analyzer	R&S®FPS13	1319.2008.13
Signal and Spectrum Analyzer	R&S®FPS30	1319.2008.30
Signal and Spectrum Analyzer	R&S®FPS40	1319.2008.40
Recommended options and extras		
see specifications for the R&S®FSV signal and spectrum analyzer (PD 3606.7982.22), the R&S®FSVA signal and spectrum analyzer (PD 3607.2790.22) and the R&S®FPS signal and spectrum analyzer (PD 3606.9433.22).		

For R&S®FSV/FSVA product brochure, see PD 3607.4129.12,
 for R&S®FPS product brochure, see PD 3606.9433.12,
 and www.rohde-schwarz.com

⁴ Max. bandwidth 10 MHz.

Service that adds value

- | Worldwide
- | Local and personalized
- | Customized and flexible
- | Uncompromising quality
- | Long-term dependability

About Rohde & Schwarz

The Rohde & Schwarz electronics group offers innovative solutions in the following business fields: test and measurement, broadcast and media, secure communications, cybersecurity, radiomonitoring and radiolocation. Founded more than 80 years ago, this independent company has an extensive sales and service network and is present in more than 70 countries. The electronics group is among the world market leaders in its established business fields. The company is headquartered in Munich, Germany. It also has regional headquarters in Singapore and Columbia, Maryland, USA, to manage its operations in these regions.

Sustainable product design

- | Environmental compatibility and eco-footprint
- | Energy efficiency and low emissions
- | Longevity and optimized total cost of ownership

Certified Quality Management
ISO 9001

Certified Environmental Management
ISO 14001

Rohde & Schwarz GmbH & Co. KG

www.rohde-schwarz.com

Rohde & Schwarz training

www.training.rohde-schwarz.com

Regional contact

- | Europe, Africa, Middle East | +49 89 4129 12345
customersupport@rohde-schwarz.com
- | North America | 1 888 TEST RSA (1 888 837 87 72)
customer.support@rsa.rohde-schwarz.com
- | Latin America | +1 410 910 79 88
customersupport.la@rohde-schwarz.com
- | Asia Pacific | +65 65 13 04 88
customersupport.asia@rohde-schwarz.com
- | China | +86 800 810 82 28 | +86 400 650 58 96
customersupport.china@rohde-schwarz.com

R&S® is a registered trademark of Rohde & Schwarz GmbH & Co. KG
Trade names are trademarks of the owners
PD 3607.4441.22 | Version 01.00 | May 2016 (as)
3GPP TD-SCDMA BS/UE Measurement Applications
Data without tolerance limits is not binding | Subject to change
© 2016 Rohde & Schwarz GmbH & Co. KG | 81671 Munich, Germany



3607444122