


R&S® QAR50 AUTOMOTIVE RADOME TESTER

Specifications

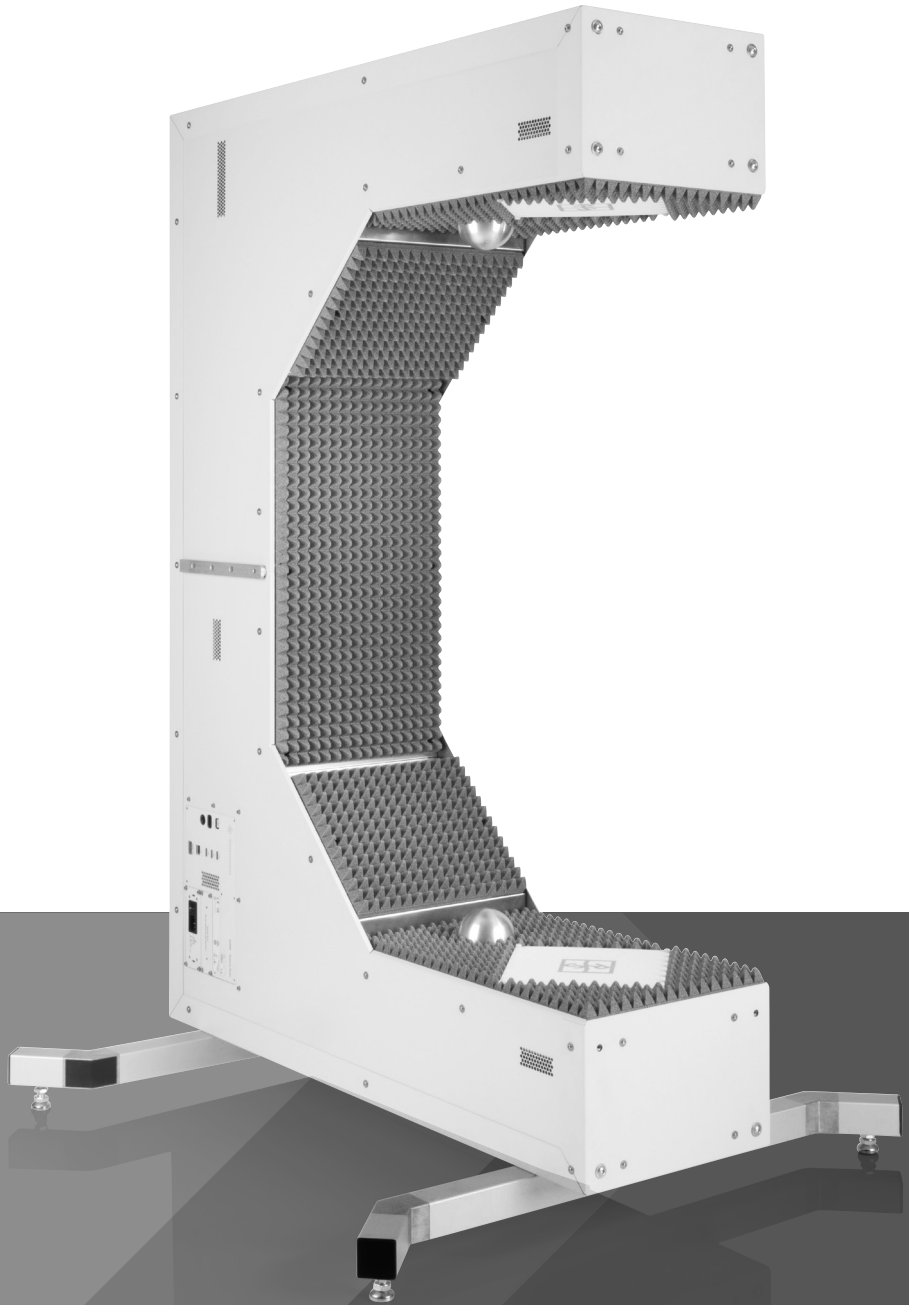

Specifications
Version 07.00

ROHDE & SCHWARZ

Make ideas real



CONTENTS

Definitions	3
Specifications.....	4
System	4
Imaging specifications	4
<i>Reflection measurements.....</i>	<i>5</i>
<i>Transmission attenuation measurements</i>	<i>5</i>
<i>Transmission phase measurements (using R&S®QAR50-K20 option).....</i>	<i>6</i>
<i>High resolution reflection measurements (using R&S®QAR50-K30 option).....</i>	<i>6</i>
Frequency resolved measurements (using R&S®QAR50-K10 option).....	6
<i>Frequency resolved reflection measurements (using R&S®QAR50-K10 option)</i>	<i>6</i>
<i>Frequency resolved attenuation measurements (using R&S®QAR50-K10 option).....</i>	<i>7</i>
Connectors and switches	7
General data.....	8
Ordering information	11

Definitions


General

Product data applies under the following conditions:

- Three hours storage at ambient temperature followed by 90 minutes warm-up operation
- Specified environmental conditions met
- Recommended calibration interval adhered to
- All internal automatic adjustments performed, if applicable

Specifications with limits

Represent warranted product performance by means of a range of values for the specified parameter. These specifications are marked with limiting symbols such as $<$, \leq , $>$, \geq , \pm , or descriptions such as maximum, limit of, minimum. Compliance is ensured by testing or is derived from the design. Test limits are narrowed by guard bands to take into account measurement uncertainties, drift and aging, if applicable.

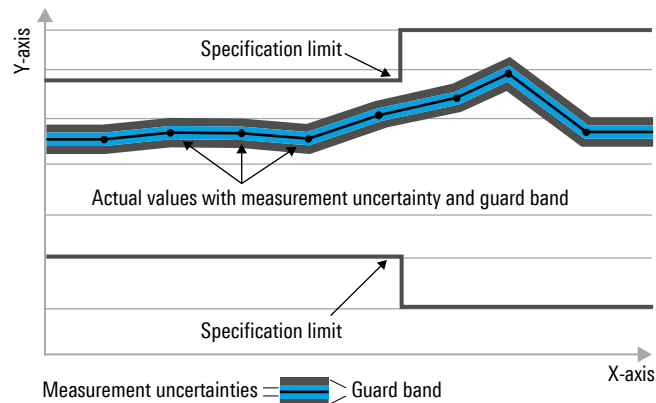

Non-traceable specifications with limits (n. trc.)

Represent product performance that is specified and tested as described under “Specifications with limits” above. However, product performance in this case cannot be warranted due to the lack of measuring equipment traceable to national metrology standards. In this case, measurements are referenced to standards used in the Rohde & Schwarz laboratories.

Specifications without limits

Represent warranted product performance for the specified parameter. These specifications are not specially marked and represent values with no or negligible deviations from the given value (e.g. dimensions or resolution of a setting parameter). Compliance is ensured by design.

Typical data (typ.)

Characterizes product performance by means of representative information for the given parameter. When marked with $<$, $>$ or as a range, it represents the performance met by approximately 80 % of the instruments at production time. Otherwise, it represents the mean value.

Nominal values (nom.)

Characterize product performance by means of a representative value for the given parameter (e.g. nominal impedance). In contrast to typical data, a statistical evaluation does not take place and the parameter is not tested during production.

Measured values (meas.)

Characterize expected product performance by means of measurement results gained from individual samples.

Uncertainties

Represent limits of measurement uncertainty for a given measurand. Uncertainty is defined with a coverage factor of 2 and has been calculated in line with the rules of the Guide to the Expression of Uncertainty in Measurement (GUM), taking into account environmental conditions, aging, wear and tear.

Device settings and GUI parameters are indicated as follows: “parameter: value”.

Non-traceable specifications with limits, typical data as well as nominal and measured values are not warranted by Rohde & Schwarz.

Specifications

Specifications apply under the following conditions: 90 minutes warm-up time at specified environmental conditions and after successfully verified calibration.

System

Measurement time		< 3 ms
Measurement time using HD mode	(active transmit time < 30 ms)	< 1.5 s
Measurement cycle base configuration	from measurement start to results display (data saving time excluded)	< 1.7 s
Measurement cycle full configuration	from measurement start to results display incl. all available software options (data saving time excluded)	< 3 s
Measurement cycle increase using HD mode		< 2.0 s
Measurement cycle reduction using R&S®QAR50-K11 fast frequency response calculation		> 0.8 s
Normalization interval		every 12 h or when device temperature changes more than 5 K
Operating system		Windows 10 IoT

Imaging specifications

Frequency range	start frequency	
	band 1	76 GHz
	band 2	76 GHz
	stop frequency	
	band 1	77 GHz
	band 2	81 GHz
	center frequency	
	band 1	76.5 GHz
	band 2	78.5 GHz
	frequency span	
	band 1	1 GHz
	band 2	5 GHz
Number of frequency steps	band 1	25
	band 2	128
Frequency accuracy		1 MHz
Scan volume (reflection band 1)	W × H × D	200 mm × 200 mm × 400 mm (7.87 in × 7.87 in × 15.74 in)
Scan volume	W × H × D	200 mm × 200 mm × 200 mm (7.87 in × 7.87 in × 7.87 in)
Voxel size	W × H × D	1.56 mm × 1.56 mm × 6.25 mm (0.06 in × 0.06 in × 0.25 in)
Image size	W × H	200 mm × 200 mm (7.87 in × 7.87 in)
Image pixel size	W × H	1.56 mm × 1.56 mm (0.06 in × 0.06 in)

Reflection measurements

Image dynamic range	of mean reflection value	> 30 dB
Maximum evaluation area	for the calculation of the mean reflection	100 mm × 100 mm (3.93 in × 3.93 in)
Minimum DUT size ¹	W × H	60 mm × 60 mm (2.36 in × 2.36 in)
Reproducibility ² and accuracy ³ of mean reflection ⁴	reproducibility of mean reflection values in linear scale ⁵	
	reproducibility ⁶	< 3 %
	accuracy ³	< 7 %
	with 0 dB mean reflection	
	reproducibility	< 0.2 dB
	accuracy	< 0.2 dB
	with –8 dB mean reflection	
	reproducibility	< 0.6 dB
	accuracy	< 1.6 dB
	with –15 dB mean reflection	
reproducibility	< 0.9 dB	
accuracy	< 3.0 dB	

Transmission attenuation measurements

Image dynamic range	of mean transmission attenuation value	> 30 dB
Maximum evaluation area	for the calculation of the mean attenuation	100 mm × 100 mm (3.94 in × 3.94 in)
Minimum DUT size ¹	W × H	60 mm × 60 mm (2.36 in × 2.36 in)
Reproducibility ² and accuracy ³ of mean attenuation ⁷	reproducibility of mean attenuation values in linear scale ⁸	
	reproducibility ⁶	< 2 %
	accuracy ³	< 5 %
	with 0 dB mean attenuation	
	reproducibility	< 0.1 dB
	accuracy	< 0.1 dB
	with 1 dB mean attenuation	
	reproducibility	< 0.1 dB
	accuracy	< 0.4 dB
	Reproducibility of high-resolution attenuation values	with 0 dB mean attenuation and HD mode enabled, averaged over 10 mm cells

¹ Provided that the evaluation area is set accordingly and fitting to the size of the device under test (DUT). The evaluation window should have at least 10 mm distance to the edge of the DUT. The normalization measurement must be performed using the same window size.

² Reproducibility values are valid, after proper normalization and for temperature changes less than 5 K. The DUT must be positioned within the test fixture.

³ Evaluated using the R&S®QAR50-Z44 accredited verification set.

⁴ The mean reflection value is defined as the arithmetic mean of the individually measured reflection values within the range [maxVal – 3 dB; maxVal]. maxVal is the maximum reflection value within the evaluation area.

⁵ Calculating measurement tolerances in dB from the specification in linear scale can be done as follows: For example, a DUT has a mean reflectivity of 50 % and the specified static reproducibility is 3 %, the measurement result can vary between 47 % and 53 %. To translate the tolerances into logarithmic scale, perform the following calculations: Minimum measured reflectivity is $20 \cdot \log_{10}(0.47) = -6.56$ dB, mean measured reflectivity is $20 \cdot \log_{10}(0.50) = -6.02$ dB and maximum measured reflectivity is $20 \cdot \log_{10}(0.53) = -5.51$ dB. The logarithmic tolerance at –6 dB reflectivity therefore is (+0.51 dB/–0.54 dB).

⁶ For stationary DUT.

⁷ The mean transmission attenuation value is defined as the arithmetic mean of the individually measured transmission attenuation values within the range [minVal; minVal + 3 dB]. minVal is the minimum transmission attenuation value within the evaluation area.

⁸ Calculating measurement tolerances in dB from the specification in linear scale can be done as follows. For example, a DUT has a mean transmission attenuation of 20 % and the specified static reproducibility is 2 %, the measurement result can vary between 18 % and 22 %. To translate the tolerances into logarithmic scale, perform the following calculations: Minimum measured transmission attenuation is $-20 \cdot \log_{10}(1-0.18) = 1.72$ dB, average measured transmission attenuation is $-20 \cdot \log_{10}(1-0.20) = 1.94$ dB and maximum measured transmission attenuation is $-20 \cdot \log_{10}(1-0.22) = 2.16$ dB. The logarithmic tolerance at 1.94 dB attenuation is therefore (+0.22 dB/–0.21 dB).

Transmission phase measurements (using R&S®QAR50-K20 option)

Image lateral resolution ⁹		≤ 8 mm (0.31 in)
Minimum DUT size ¹⁰	W × H	60 mm × 60 mm (2.7 in × 2.7 in)
Phase resolution ¹¹	with 0 dB mean attenuation	±2°
	with 0 dB mean attenuation and HD mode enabled, averaged over 10 mm cells	±1°

High resolution reflection measurements (using R&S®QAR50-K30 option)

Image lateral resolution		≤ 8 mm (0.31 in)
Frequency range	band 2	
	start frequency	76 GHz
	stop frequency	81 GHz
	center frequency	78.5 GHz
	frequency span	5 GHz
Number of frequency steps	band 2	128

Frequency resolved measurements (using R&S®QAR50-K10 option)

Frequency range (measurement range)	start frequency	72 GHz
	stop frequency	82 GHz
	center frequency	77 GHz
	frequency span	10 GHz
Number of frequency steps		256
Frequency accuracy		1 MHz
Frequency range (analysis range after time gating)	start frequency	73 GHz
	stop frequency	81 GHz
	center frequency	77 GHz
	frequency span	8 GHz

Frequency resolved reflection measurements (using R&S®QAR50-K10 option)

Dynamic range		> 30 dB
Minimum DUT size ¹	W × H	60 mm × 60 mm (2.36 in × 2.36 in)
Reproducibility and accuracy of reflection ¹² per frequency point ¹³	reproducibility of reflection values in linear scale	
	repeatability	< 7 %
	accuracy	< 12 %
	with 0 dB reflection	
	repeatability	< 0.4 dB
	accuracy	< 0.4 dB
	with –8 dB reflection	
	repeatability	< 1.6 dB
	accuracy	< 3.0 dB
	with –15 dB reflection	
	repeatability	< 3.0 dB
	accuracy	< 6.0 dB

⁹ Lateral image resolution defines the minimum distance of two phase steps to be resolved.

¹⁰ Provided that the evaluation area is fitting to the size of the device under test (DUT). The evaluation area should have at least 15 mm distance to the edge of the DUT.

¹¹ Phase resolution defines the minimum phase difference in a DUT that can be resolved inside the calculated image. All values are evaluated with 0 dB mean attenuation.

¹² Automatic processing detects the pixel with the highest reflectivity inside the recovered image and calculates the frequency response of this specific point of the DUT.

¹³ Time gating is used to reduce standing waves. Measurement values are valid for frequencies between 73 GHz and 81 GHz.

Frequency resolved attenuation measurements (using R&S®QAR50-K10 option)

Dynamic range ¹⁴		> 30 dB
Minimum DUT size ¹	W x H	60 mm x 60 mm (2.36 in x 2.36 in)
Reproducibility of attenuation ¹⁵ per frequency point ¹³	reproducibility of transmission attenuation values in linear scale	
	repeatability	< 3 %
	accuracy	< 5 %
	with 0 dB mean attenuation	
	repeatability	< 0.2 dB
	accuracy	< 0.2 dB
	with 1 dB mean attenuation	
repeatability	< 0.2 dB	
accuracy	< 0.4 dB	

Connectors and switches

4 x USB 3.0	(1) and (3), see Fig. 1	for keyboard, mouse and general use
Power button	(2), see Fig. 1	for switching on and off
LAN	(5), see Fig. 1	1 Gbit
Display port	(6), see Fig. 1	display connector for monitor
AC inlet and mains power switch	(7), see Fig. 1	for mains power supply

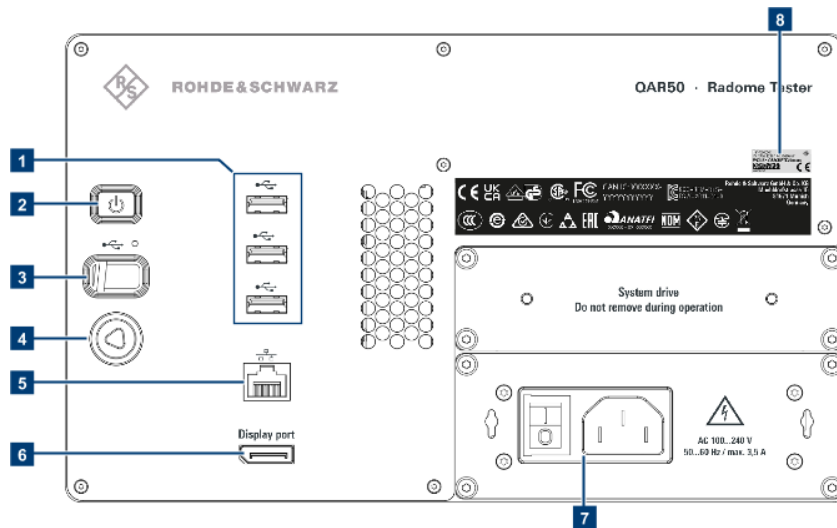


Fig. 1: Connector board of the R&S®QAR50

¹⁴ Dynamic range > 30 dB is ensured for 95 % of all frequency points. Minimum dynamic range of 25 dB is ensured for the complete frequency range.

¹⁵ Automatic processing detects the pixel with the lowest transmission attenuation inside the recovered image and calculates the frequency response of this specific point of the DUT.

General data

Environmental conditions		
Temperature	operating temperature range	+5 °C to +40 °C
	storage temperature range	−10 °C to +60 °C
Humidity		+25 °C/+40 °C, 95 % rel. humidity, cyclic, in line with EN 60068-2-30; +40 °C, 95 % rel. humidity, steady state
Installation altitude		max. 2000 m above sea level
Vibration	sinusoidal	5 Hz to 55 Hz, 0.15 mm amplitude const., 55 Hz to 150 Hz, 0.5 g const., in line with EN 60068-2-6
	random	8 Hz to 500 Hz, acceleration: 1.2 g RMS, in line with EN 60068-2-64
Shock		40 g shock spectrum, in line with MIL-STD-810E, method 516.4
Transport		in line with: <ul style="list-style-type: none"> • EN 60068-2-27 • EN 60068-2-31 • EN 60068-2-64
Surroundings	<ul style="list-style-type: none"> • installation to be maintained in low-reflection environment • metal walls or strong reflectors in the proximity of the imaging zone to be avoided 	

Power rating		
Rated voltage		100 V to 240 V AC (± 10 %)
Rated current		max. 3.5 A
Power consumption	average	150 W
	standby	3 W
Rated frequency		50 Hz to 60 Hz (± 5 %)

Product conformity		
Electromagnetic compatibility	EU: in line with EMC Directive 2014/30/EU	
	emission tests	in line with EN 55011
	immunity tests	in line with EN 61326-1
Electrical safety	EU: in line with Low Voltage Directive 2014/35/EU	applied standards: <ul style="list-style-type: none"> • EN 61010-1 • IEC 61010-1
	USA	UL 61010-1
Hazardous substances	EU: in line with Directive on the restriction of the use of certain hazardous substances in electrical and electronic equipment (RoHS) 2011/65/EU	applied standard: EN IEC 63000

Dimensions		
Base unit	W x H x D	325.8 mm x 1002.4 mm x 1428.6 mm (12.83 in x 39.46 in x 56.24 in)
Incl. mounting		see Fig. 2 and Fig. 3 ¹⁶

Weight		
Base unit		78 kg (172 lb)

¹⁶ Note, that dimensions can vary slightly depending on setup orientation due to cover screws filling the mounting points of the R&S®QAR50.

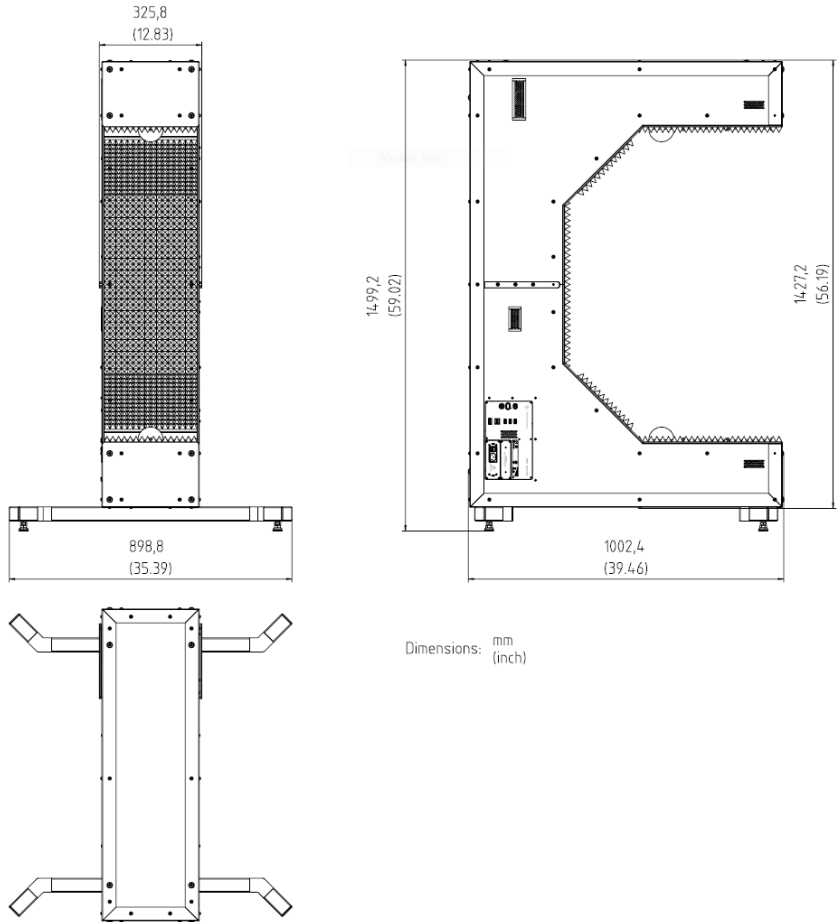


Fig. 2: Dimensions of the R&S®QAR50 including mounting base in a standing position

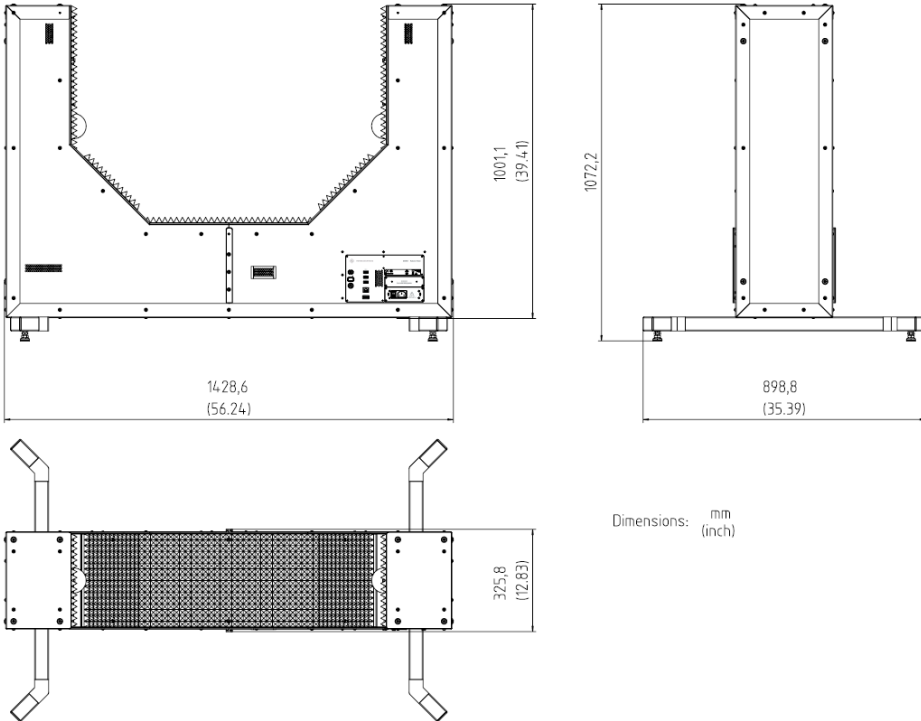


Fig. 3: Dimensions of the R&S®QAR50 including mounting base in a lying position

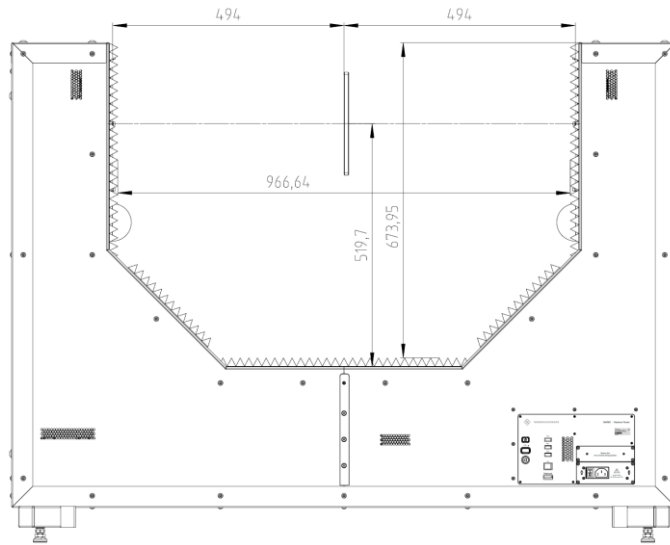


Fig. 4: Inner dimensions of the R&S®QAR50

Shipping dimensions (W × H × D)		
Base unit		800 mm × 1280 mm × 1560 mm (31.5 in × 50.4 in × 61.4 in)
Verification set (R&S®QAR50-Z44)		980 mm × 750 mm × 270 mm (38.6 in × 29.6 in × 10.7 in)

Shipping weight		
Base unit		135 kg (298 lb)
Verification set (R&S®QAR50-Z44)		19 kg (42 lb)

Ordering information

Designation	Type	Order No.
Radome tester, vertical polarization	R&S®QAR50	1343.0099K02
Radome tester, horizontal polarization	R&S®QAR50	1343.0099K03
Options		
Verification set	R&S®QAR50-Z44	1343.0082.02
Polarization change to vertical	R&S®QAR50-U02	1343.0060.02
Polarization change to horizontal	R&S®QAR50-U03	1343.0076.02
Software options		
Frequency response measurement	R&S®QAR50-K10	1343.2091.02
Fast frequency response calculation	R&S®QAR50-K11	1343.2840.02
Homogeneity analysis	R&S®QAR50-K20	1343.2110.02
High resolution image	R&S®QAR50-K30	1343.2133.02
Real-time imaging reflection	R&S®QAR50-K80	1343.2904.02

Service at Rohde & Schwarz
You're in great hands

- ▶ Worldwide
- ▶ Local and personalized
- ▶ Customized and flexible
- ▶ Uncompromising quality
- ▶ Long-term dependability

Rohde & Schwarz

The Rohde&Schwarz technology group is among the trailblazers when it comes to paving the way for a safer and connected world with its leading solutions in test & measurement, technology systems and networks&cybersecurity. Founded more than 85 years ago, the group is a reliable partner for industry and government customers around the globe. The independent company is headquartered in Munich, Germany and has an extensive sales and service network with locations in more than 70 countries.

www.rohde-schwarz.com

Sustainable product design

- ▶ Environmental compatibility and eco-footprint
- ▶ Energy efficiency and low emissions
- ▶ Longevity and optimized total cost of ownership

Certified Quality Management

ISO 9001

Certified Environmental Management

ISO 14001

Rohde & Schwarz training

www.training.rohde-schwarz.com

Rohde & Schwarz customer support

www.rohde-schwarz.com/support

