


R&S® FSV3-K200R

200 MHz REAL-TIME SPECTRUM MEASUREMENTS

Specifications

R&S® FSVA3000 Signal and Spectrum Analyzer
R&S® FSV3000 Signal and Spectrum Analyzer

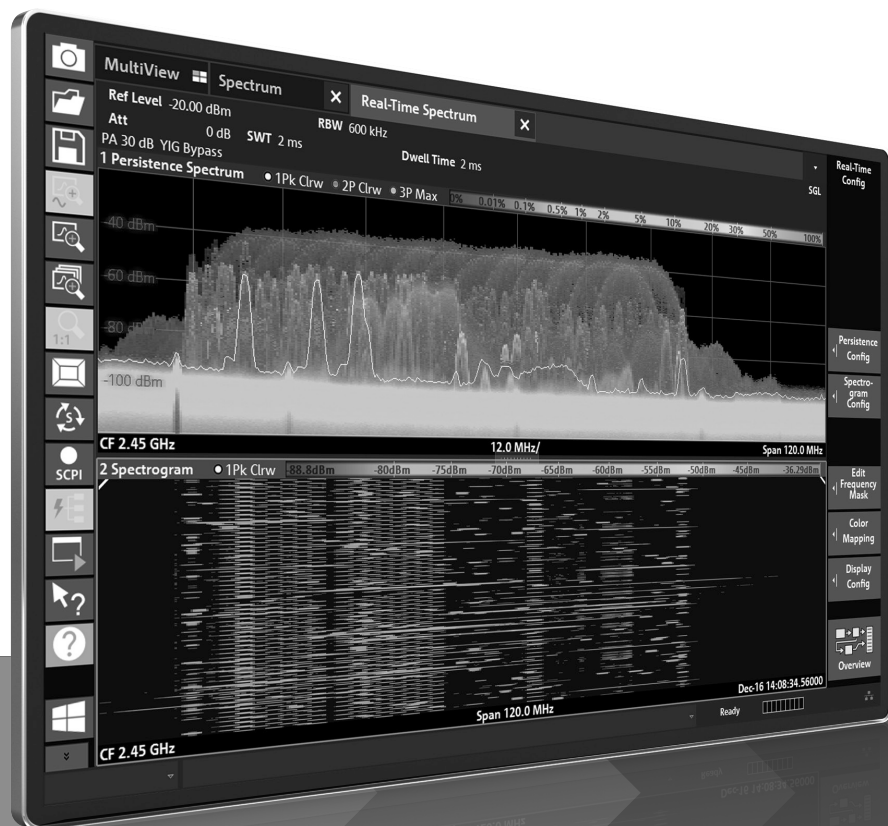

Specifications
Version 01.00

ROHDE & SCHWARZ
Make ideas real



CONTENTS

Definitions	3
Specifications.....	4
General data.....	4
Result display	5
Trigger.....	5
Ordering information	6
Real-time spectrum measurement application	6
R&S®FSVA3000, R&S®FSV3000 signal and spectrum analyzers	6

Definitions

General

Product data applies under the following conditions:

- Three hours of storage at ambient temperature followed by 30 minutes of warm-up operation
- Specified environmental conditions met
- Recommended calibration interval adhered to
- All internal automatic adjustments performed, if applicable

Specifications with limits

Represent warranted product performance by means of a range of values for the specified parameter. These specifications are marked with limiting symbols such as $<$, \leq , $>$, \geq , \pm or descriptions such as maximum, limit of, minimum. Compliance is ensured by testing or is derived from the design. Test limits are narrowed by guard bands to take into account measurement uncertainties, drift and aging, if applicable.



Non-traceable specifications with limits (n. trc.)

Represent product performance that is specified and tested as described under “Specifications with limits” above. However, product performance in this case cannot be warranted due to the lack of measuring equipment traceable to national metrology standards. In this case, measurements are referenced to standards used in the Rohde & Schwarz laboratories.

Specifications without limits

Represent warranted product performance for the specified parameter. These specifications are not specially marked and represent values with no or negligible deviations from the given value, e.g. dimensions or resolution of a setting parameter. Compliance is ensured by design.

Typical data (typ.)

Characterizes product performance by means of representative information for the given parameter. When marked with $<$, $>$ or as a range, it represents the performance met by approximately 80 % of the instruments at production time. Otherwise, it represents the mean value.

Nominal values (nom.)

Characterize product performance by means of a representative value for the given parameter, e.g. nominal impedance. In contrast to typical data, a statistical evaluation does not take place and the parameter is not tested during production.

Measured values (meas.)

Characterize expected product performance by means of measurement results gained from individual samples.

Uncertainties

Represent limits of measurement uncertainty for a given measurand. Uncertainty is defined with a coverage factor of 2 and has been calculated in line with the rules of the Guide to the Expression of Uncertainty in Measurement (GUM), taking into account environmental conditions, aging, wear and tear.

Device settings and GUI parameters are designated with the format “parameter: value”.

Non-traceable specifications with limits, typical data as well as nominal and measured values are not warranted by Rohde & Schwarz.

In line with the 3GPP standard, chip rates are specified in million chips per second (Mcps), whereas bit rates and symbol rates are specified in billion bit per second (Gbps), million bit per second (Mbps), thousand bit per second (kbps), million symbols per second (MSPS) or thousand symbols per second (ksps), and sample rates are specified in million samples per second (Msample/s). Gbps, Mcps, Mbps, MSPS, kbps, ksps and Msample/s are not SI units.

Specifications

The specifications of the R&S®FSV3-K200R 200 MHz real-time spectrum measurements option are based on the specifications of the respective signal and spectrum analyzer, namely the R&S®FSVA3000 specifications document (PD 5216.1211.22) and the R&S®FSV3000 specifications document (PD 5216.1334.22).

General data

Real-time bandwidth (span)		
Range	standard	1 MHz to 28 MHz
	with R&S®FSV3-B40 option	1 MHz to 40 MHz
	with R&S®FSV3-B200 option	1 MHz to 200 MHz
	with R&S®FSV3-B400 option	1 MHz to 200 MHz
	with R&S®FSV3-B600 or -B601 option	1 MHz to 200 MHz
	with R&S®FSV3-B1000 or -B1001 option	1 MHz to 200 MHz

Resolution bandwidths		
Range ¹	standard	312.5 Hz to 10 MHz
	with R&S®FSV3-B8E option	312.5 Hz to 40 MHz

Sweep time		
Sweep time range		50 µs to 1 s ²

FFT processing		
Number of sweep (trace) points		205/409/819/1639/3277/6553 ³
FFT length		256/512/1024/2048/4096/8192 ⁴
FFT window		Blackman-Harris
Maximum spectrum (FFT) processing rate		296 000/s (nom.) ⁵

Minimum signal duration for 100 % probability of intercept with full amplitude accuracy (nom.) ⁶								
Trace detector = max. peak								
Span	span/RBW ratio							
	6.25	50	200	400	800	1600	3200	
200 MHz	3.44 µs	3.85 µs	8.66 µs	17.31 µs	34.62 µs	181.84 µs	363.67 µs	
40 MHz	3.68 µs	5.76 µs	16.26 µs	32.49 µs	64.97 µs	242.53 µs	485.03 µs	
28 MHz	3.81 µs	6.78 µs	20.33 µs	40.63 µs	81.23 µs	275.04 µs	550.05 µs	
1 MHz	15.38 µs	98.58 µs	386.76 µs	772.71 µs	1.54 ms	3.2 ms	6.4 ms	
Number of sweep points	205	205	409	819	1639	3277	6553	
FFT length	256	256	512	1024	2048	4096	8192	

¹ The minimum and maximum resolution bandwidth is defined with respect to the minimum and maximum span only.

² Time period during which individual FFTs contribute to the results of the selected trace detector.

³ Depends on span/RBW ratio, i.e. more trace points for a larger ratio (higher frequency resolution).

⁴ Depends on span/RBW ratio, i.e. larger FFT length for a larger ratio (higher frequency resolution).

⁵ For a 256 FFT length

⁶ Events lasting shorter than the minimum signal duration specification will result in degraded level accuracy.

Result display

Result display types with or without active frequency mask trigger or in any combination		<ul style="list-style-type: none"> • real-time spectrum • persistence spectrum • spectrogram
--	--	---

Real-time spectrum		
Number of traces		4
Trace detector		<ul style="list-style-type: none"> • positive peak • negative peak • average • RMS • sample
Trace functions		<ul style="list-style-type: none"> • clear write • view • blank
Number of markers		16
Marker readout		frequency, level

Persistence spectrum		
Probability range covered by bitmap colors		<ul style="list-style-type: none"> • 0 % to 100 % (selectable) • truncate
Color maps		<ul style="list-style-type: none"> • hot • cold • radar • grayscale
Color mapping curve		shape adjustable
Persistence duration		0 s to 8 s
Maximum hold persistence bitmap	in addition to persistence spectrum display	on (selectable intensity), off
Number of markers		16
Marker readout		frequency, level, hit probability
Trace 1 of real-time spectrum	in addition to persistence spectrum display	on, off

Spectrogram		
Level range covered by bitmap colors		0 % to 100 % (selectable)
Color maps		<ul style="list-style-type: none"> • hot • cold • radar • grayscale
Color mapping curve		shape adjustable
History depth		3000 frames
Trace detector		coupled to real-time spectrum
Number of markers		16
Marker readout		frequency, level, time/frame number

Trigger

Trigger source		<ul style="list-style-type: none"> • free run • frequency mask
-----------------------	--	--

Frequency mask trigger		
Trigger conditions		<ul style="list-style-type: none"> • enter mask area • leave mask area
Trigger modes		stop on trigger
Trigger mask		
Mask shape generation		<ul style="list-style-type: none"> • manual • auto set (mask derived from the measured spectrum)

Ordering information

Real-time spectrum measurement application

Designation	Type	Order No.	Remarks
200 MHz real-time spectrum measurements	R&S®FSV3-K200R	1346.6552.02	R&S®FSV3-B114 option model .03 or higher required

R&S®FSVA3000, R&S®FSV3000 signal and spectrum analyzers

Designation	Type	Order No.	Remarks
Base units			
R&S®FSVA3000			
Signal and spectrum analyzer, 10 Hz to 4 GHz	R&S®FSVA3004	1330.5000.05	
Signal and spectrum analyzer, 10 Hz to 7.5 GHz	R&S®FSVA3007	1330.5000.08	
Signal and spectrum analyzer, 10 Hz to 13.6 GHz	R&S®FSVA3013	1330.5000.14	
Signal and spectrum analyzer, 10 Hz to 30 GHz	R&S®FSVA3030	1330.5000.31	
Signal and spectrum analyzer, 10 Hz to 44 GHz	R&S®FSVA3044	1330.5000.44	
Signal and spectrum analyzer, 10 Hz to 50 GHz	R&S®FSVA3050	1330.5000.51	
R&S®FSV3000			
Signal and spectrum analyzer, 10 Hz to 4 GHz	R&S®FSV3004	1330.5000.04	
Signal and spectrum analyzer, 10 Hz to 7.5 GHz	R&S®FSV3007	1330.5000.07	
Signal and spectrum analyzer, 10 Hz to 13.6 GHz	R&S®FSV3013	1330.5000.13	
Signal and spectrum analyzer, 10 Hz to 30 GHz	R&S®FSV3030	1330.5000.30	
Signal and spectrum analyzer, 10 Hz to 44 GHz	R&S®FSV3044	1330.5000.43	
Signal and spectrum analyzer, 10 Hz to 50 GHz	R&S®FSV3050	1330.5000.50	
Hardware options			
Resolution bandwidth up to 40 MHz	R&S®FSV3-B8E	1346.4337.02	the signal analysis bandwidth is defined by the R&S®FSV3-B40/-B200/-B400/-B601/-B1001 options, not by the R&S®FSV3-B8E option; user-retrofitable; R&S®FSV3-B11 option is recommended in addition for frequencies > 7.5 GHz
YIG preselector bypass	R&S®FSV3-B11	1330.3865.02	required for signal analysis at center frequencies > 7.5 GHz with R&S®FSV3-B40/-B200/-B400/-B601/-B1001 options; for R&S®FSV3013/FSV3013, R&S®FSVA3030/FSV3030, R&S®FSVA3044/FSV3044, R&S®FSVA3050/FSV3050; user-retrofitable (license key)
40 MHz analysis bandwidth	R&S®FSV3-B40	1330.4103.02	user-retrofitable (license key) ⁷
200 MHz analysis bandwidth	R&S®FSV3-B200	1330.4132.02	R&S®FSV3-B114 option required for R&S®FSV3000 models ⁷
400 MHz analysis bandwidth	R&S®FSV3-B400	1330.7154.02	for R&S®FSVA3000 models only ⁷
600 MHz analysis bandwidth	R&S®FSV3-B601	1346.5762.02	for R&S®FSVA3004, R&S®FSVA3007
		1346.5762.12	for R&S®FSVA3013, R&S®FSVA3030, R&S®FSVA3044, R&S®FSVA3050 ⁷
1 GHz analysis bandwidth	R&S®FSV3-B1001	1346.5779.02	for R&S®FSVA3004, R&S®FSVA3007
		1346.5779.12	for R&S®FSVA3013, R&S®FSVA3030, R&S®FSVA3044, R&S®FSVA3050 ⁷

⁷ R&S®FSV3-B11 option is recommended in addition for signal analysis at frequencies > 7.5 GHz.

Enhanced computing power	R&S®FSV3-B114	1330.4910.03	not retrofittable; for R&S®FSV3000 models
		1330.4910.04	mandatory; for R&S®FSVA3000 models

Service at Rohde & Schwarz
You're in great hands

- ▶ Worldwide
- ▶ Local and personalized
- ▶ Customized and flexible
- ▶ Uncompromising quality
- ▶ Long-term dependability

Rohde & Schwarz

The Rohde & Schwarz technology group is among the trailblazers when it comes to paving the way for a safer and connected world with its leading solutions in test & measurement, technology systems and networks & cybersecurity. Founded 90 years ago, the group is a reliable partner for industry and government customers around the globe. The independent company is headquartered in Munich, Germany and has an extensive sales and service network with locations in more than 70 countries.

www.rohde-schwarz.com

Sustainable product design

- ▶ Environmental compatibility and eco-footprint
- ▶ Energy efficiency and low emissions
- ▶ Longevity and optimized total cost of ownership

Certified Quality Management

ISO 9001

Certified Environmental Management

ISO 14001

Rohde & Schwarz training

www.training.rohde-schwarz.com

Rohde & Schwarz customer support

www.rohde-schwarz.com/support

